

SANY[®]

SPECIFICATION

BETTER WORLD, BETTER SANY CRANE



SAC40000T

SANY ALL TERRAIN CRANE



4000 t



81 m



8000 t·m



350 t

■ www.sanyglobal.com

QUALITY CHANGES THE WORLD

The parameters, pictures and standard/optional equipment are only for reference in this brochure, the actual machine is based on the effective price list and contract.

V1.0

QUALITY CHANGES THE WORLD

It is one of the core business units in SANY Group, specializing in the development and manufacturing of high-end wheel cranes, crawler cranes and tower cranes.

三一集团旗下核心事业部，从事高端轮式起重机、履带起重机、塔式起重机系列产品的研发制造。

BETTER WORLD, BETTER SANY CRANE

SANY CRANE

QUALITY CHANGES THE WORLD

▶ CONTENTS

目录

Highlights 整机亮点	▶ 04
Overall Dimensions 整机尺寸	▶ 06
Technical Specification 整机参数	▶ 07
Counterweight Combinations 配重组合图	▶ 08
Jib Combinations 臂架组合	▶ 09
On-Site Heavy-Duty Driving Solutions 重载转场图	▶ 10
Transport Dimensions 部件运输尺寸	▶ 12
Crane Introduction 整机介绍	▶ 17
Load Chart 性能表	▶ 19

9-axle Wheeled Crane

9桥4000吨轮式起重机

Lifting capacity of 375t at a height of 100m with an 18m radius.
Lifting capacity of 320t at a height of 120m with a 21m radius.
Lifting capacity of 280t at a height of 140m with a 24m radius.
Lifting capacity of 240t at a height of 160m with a 27m radius.
Lifting capacity of 230t at a height of 170m with a 28m radius.
Lifting capacity of 200t at a height of 185m with a 30m radius.
Lifting capacity of 180t at a height of 190m with a 30m radius.

100m高, 18m幅度; 吊重375t;

120m高, 21m幅度; 吊重320t;

140m高, 24m幅度; 吊重280t;

160m高, 27m幅度; 吊重240t;

170m高, 28m幅度; 吊重230t;

185m高, 30m幅度; 吊重200t;

190m高, 30m幅度; 吊重180t。

Heavy-duty Driving, Flexible Travel on Site

重载行驶、转场灵活

Equipped with custom heavy-duty axles and 605 tires, it can travel on-site with the superlift.

6+2 dual drive system, with a maximum gradeability of 18% while carrying the boom.

定制重载车桥+605轮胎, 可带超起转场;

6+2双驱动, 爬坡度带臂时最大18%。



Mainstream Configuration

主流配置

Dual 566 kW Weichai engines.
ZF 12-speed transmission.
Heavy-duty special axles.
605 tires.
i-Cab.
Dual winches + 34mm steel wire rope, 1400m in length.

双发566KW大功率潍柴发动机;
采埃孚12挡变速箱;
特种重载车桥;
605轮胎;
领致全新驾驶室;
双卷扬+34mm钢丝绳, 长度1400m。

Convenient Assembly & Disassembly Efficient Operation

拆装便捷、作业高效

Single-side superlift: Independently removable on both sides, assembly and disassembly time is less than 1 hour.
Superlift/jib mast linkage: Slewing without hitting the wind turbine tower, making operations more efficient.
Auxiliary rope threading winch: Single rope threading time is less than 70 minutes, with a 50% increase in efficiency.
No auxiliary lifting required: 76m jib or less can be self-installed without the need for auxiliary crane.
25 minutes: With dual winch configuration, lifting a 230t load to a height of 170m takes less than 25 minutes.

单边超起: 单次拆装时间小于1小时;
超起/副臂桅杆联动: 回转不碰塔, 作业更高效;
辅助穿绳卷扬: 单次穿绳时间小于70分钟, 效率提升50%;
无需辅吊: 76m及以下副臂无需辅吊可自主起臂;
25分钟: 双卷扬230t起升至170m高空不超过25分钟。

Intelligent Innovation, Safe and Reliable

智能创新、安全可靠

Intelligent boom status recognition and active control technology ensure safe and worry-free operation of ultra-long booms during extension and retraction.
Pioneering real-time side-bending angle monitoring technology eliminates reliance on experience, enabling early detection and avoidance of potential dangers.
Upgraded dual-winch synchronized lifting technology, with a newly added signal receiver improving signal stability by 20%, and an upgraded high-capacity battery doubling the endurance.

臂架姿态智能识别与主动控制技术, 超长臂架伸缩安全无忧;
首创旁弯角度实时监测技术, 告别经验依赖, 做到危险提前识别和规避;
升级双卷扬协同吊载技术, 新增信号接收器信号稳定性提升20%, 升级大容量电池, 续航能力翻倍。



SAC40000T
SANY ALL TERRAIN CRANE



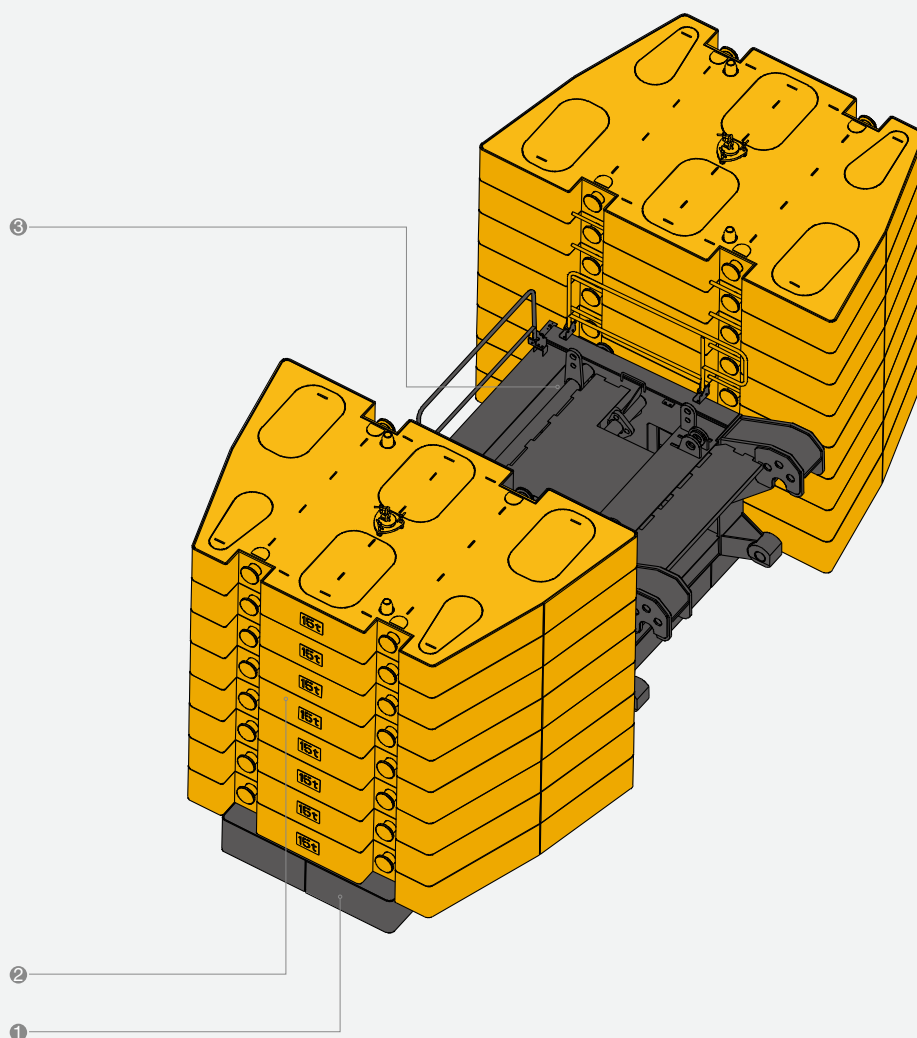
Technical Specification

整机参数

CATEGORY 类型	ITEM 项目	UNIT 单位	VALUE 参数	
CAPACITY 额定起重量	Max. lifting capacity 最大起重量	t	4000	
WEIGHT 重量参数	Gross weight (Chassis) 整机质量(底盘)	t	78.4	
	Axle load 载荷	Axles 1, 2, 3, 4, 5 第一、二、三、四、五轴负荷	t	11
		Axles 6, 7, 8, 9 第六、七、八、九轴负荷	t	10
	Gross weight (Chassis+turntable+6-section boom+main winch+superlift) 整机总质量(底盘+支腿+转台+6节主臂+主卷扬+超起)		t	411
	Axle load 载荷	Axles 1, 2, 3, 4, 5 第一、二、三、四、五轴负荷	t	46.9
		Axles 6, 7, 8, 9 第六、七、八、九轴负荷	t	44.2
POWER (SUPERSTRUCTURE) 发动机参数(上车)	Engine model 发动机型号	-	WEICHAI WP17TG770E304	
	Rated engine power 额定功率	kW/rpm	566/1900	
	Rated engine torque 额定扭矩	N·m/rpm	3300/1200~1600	
POWER (CHASSIS) 发动机参数(下车)	Engine model 发动机型号	-	WEICHAI WP17TG770E304	
	Rated engine power 额定功率	kW/rpm	566/1900	
	Rated engine torque 额定扭矩	N·m/rpm	3300/1200~1600	
DIMENSIONS 尺寸参数	Overall length 整机全长	mm	22095	
	Overall width 整机全宽	mm	3600	
	Overall height 整机全高	mm	3320	
	Axle base 轴距	Axles 1 & 2 第一、二轴距	mm	1750
		Axles 2 & 3 第二、三轴距	mm	2350
		Axles 3 & 4 第三、四轴距	mm	1770
		Axles 4 & 5 第四、五轴距	mm	1750
		Axles 5 & 6 第五、六轴距	mm	3330
		Axles 6 & 7 第六、七轴距	mm	1750
		Axles 7 & 8 第七、八轴距	mm	3350
		Axles 8 & 9 第八、九轴距	mm	1750
	Nth axle track width 第N轴轮距	mm	2988/2988/2988/2988/2988/2988/ 2988/2988/2988	
	TRAVEL 行驶参数	Max. travel speed (Chassis with main winch) 最高行驶速度(底盘带主卷扬)	km/h	60
Steering radius 转弯半径		m	16	
Min. ground clearance 最小离地间隙		mm	350	
Approach angle 接近角		°	23.3	
Departure angle 离去角		°	18.6	
Max. gradeability (Chassis with main winch) 最大爬坡度(底盘带主卷扬)		%	45	
Wheel formula 车轮模式		-	9-axle + pneumatic suspension + 6-axle main drive (1, 2, 3, 5, 6, 7) + 2-axle auxiliary drive (8, 9) 9桥+油气悬挂+6桥主驱 (1,2,3,5,6,7)+2桥辅驱 (8,9)	
MAIN PERFORMANCE 主要性能参数	Min. rated lifting radius 最小额定幅度	mm	2000	
	Tail slewing radius 转台尾部回转半径	mm	11160	
	Max. boom sections (Qty.) 最大臂节数	-	6	
	Max.lifting moment 最大起重力矩	Basic boom 基本臂	t·m	8000
		Full-extension boom 全伸主臂	t·m	-
		Max. boom + fixed jib 最长主臂 + 最长固定副臂	t·m	6440
	Boom length 臂长	Basic boom 基本臂	mm	19000
		Full-extension boom 全伸主臂	mm	81000
		Max. boom + fixed jib 最长主臂 + 最长固定副臂	mm	187000
Outrigger span (Longitudinal×Transverse) 支腿跨距(纵×横)	mm	15000×15000		
OPERATION SPEED 工作速度参数	Max. hoisting speed of main winch (Empty load) 主卷扬最大提升速度(空载)	m/min	≤123	
	Max. hoisting speed of auxiliary winch (Empty load) 副卷扬最大提升速度(空载)	m/min	≤123	
	Full extension time of boom 主臂全伸缩时间	s	≤1600	
	Full luffing up/down time of boom 起重臂全起落幅时间	s	≤240	
	Slewing speed 回转速度	rpm	0.5	

Counterweight Combinations

配重组合图



NOTE:

- ① 15t/10t single counterweight block
- ② Counterweight tray
- ③ Counterweight rack

标注:

- ① 15t/10t单个配重块
- ② 配重托盘
- ③ 配重挂架

350t

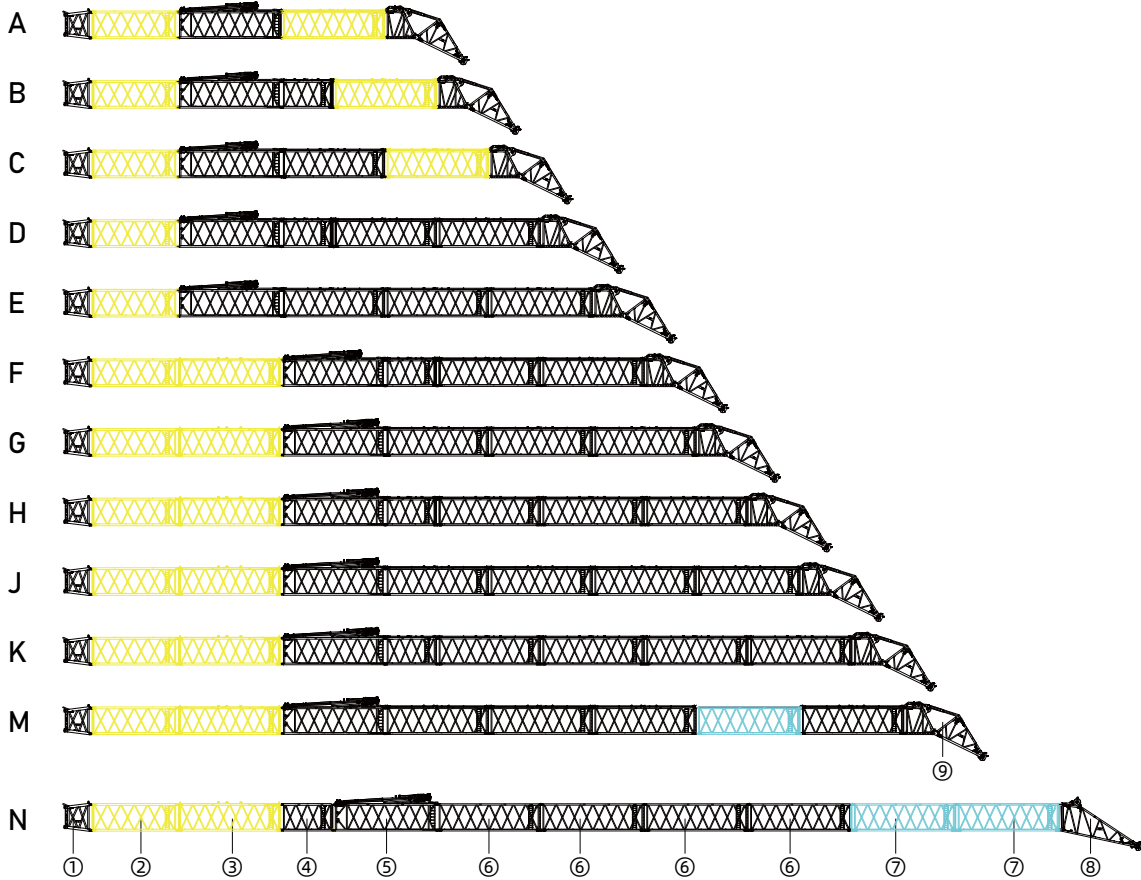
Counterweight
配重

15t×10+10t×20

Combination
组合形式

Jib Combinations

臂架组合



①	②	③	④	⑤	⑥	⑦	⑧	⑨
3m boom and jib adapter 3m主臂臂转接头	10m reinforcing section 10m加强节	12m reinforcing section 12m加强节	6m standard section 6m标准节	12m superlift connecting support 12m超起连接架	12m standard section 12m标准节	Light-duty 12m standard section 轻型12m标准节	Light-duty 9m boom head 轻型9m臂头	Heavy-duty 9m boom head 重型9m臂头

Jib Combination 副臂组合	Jib Length 副臂长度	Jib Section Composition 臂节组件	Jib Length Composition 长度组成
A	46m	1+2+5+3+9	3m+10m+12m+12m+9m
B	52m	1+2+5+4+3+9	3m+10m+12m+6m+12m+9m
C	58m	1+2+5+6+3+9	3m+10m+12m+12m+12m+9m
D	64m	1+2+5+4+6+6+9	3m+10m+12m+6m+12m+12m+9m
E	70m	1+2+5+6+6+6+9	3m+10m+12m+12m+12m+12m+9m
F	76m	1+2+3+5+4+6+6+9	3m+10m+12m+12m+6m+12m+12m+9m
G	82m	1+2+3+5+6+6+6+9	3m+10m+12m+12m+12m+12m+12m+9m
H	88m	1+2+3+5+4+6+6+6+9	3m+10m+12m+12m+6m+12m+12m+12m+9m
J	94m	1+2+3+5+6+6+6+6+9	3m+10m+12m+12m+12m+12m+12m+12m+9m
K	100m	1+2+3+5+4+6+6+6+6+9	3m+10m+12m+12m+6m+12m+12m+12m+12m+9m
M	106m	1+2+3+5+6+6+6+7+6+9	3m+10m+12m+12m+12m+12m+12m+12m+9m
N	124m	1+2+3+4+5+6+6+6+7+7+8	3m+10m+12m+6m+12m+12m+12m+12m+12m+12m+12m+9m

Note: The use of any wind power jib configuration not shown in the combination diagram is strictly prohibited.

注：禁止使用任何风电副臂组合图中没有的副臂组合。

On-Site Heavy-Duty Driving Solutions

重载转场图

Road Transfer 公路转场


Taking the condition with a 170m tower height as an example, with the basic machine and accessories included, the trailers can all be kept within level 2 oversize transport limits.

以170m塔筒高度工况为例,主机含附件均可控制在二级超限以内运输。




Basic machine (without outriggers)
主机(不含支腿)

78.4t




10t counterweight block×3
10t配重块×3

30t




1st section boom + 2nd section boom +
telescoping cylinder
一节臂+二节臂+伸缩油缸

63t




3th, 4th, 5th, 6th section boom
三、四、五、六节臂

67t




Auxiliary winch + turntable + slewing
bearing + transport tooling
副卷扬+转台+回转支承+运输工装

66.5t




Right superlift
右超起

28t




Left superlift
左超起

28t



Outrigger pad + main winch + 3m boom and jib
connecting support + 10m reinforcing section
支腿垫板+主卷扬+3m主副臂连接架+10m加强节

30.3t




Outrigger pad × 2 + 400t hook + 6m left
luffing cylinder × 2
支腿垫板×2+400t起重钩+6m大截面×2

27.8t




15t counterweight block + outrigger pad + 9m jib head
rotating section + 12m reinforcing section
15t配重块+支腿垫板+9m臂头旋转段+12m加强节

28.5t




15t counterweight block + 10t counterweight
block + 12m mast
15t配重块+10t配重块+12m桅杆节

33.4t




10t counterweight block + 12m large section
+ left luffing cylinder
10t配重块+12m大截面+左变幅油缸

33.4t




10t counterweight block + 12m large section
+ right luffing cylinder
10t配重块+12m大截面+右变幅油缸

33.4t




15t counterweight + 10t counterweight +
12m large section
15t配重块+10t配重块+12m大截面

31.1t




Right rear outrigger + left rear outrigger +
superlift 4m standard section
右后支腿+左后支腿+超起4m标准节

28t




10t counterweight + 15t counterweight + 9m fixed jib head
section + left front outrigger + right front outrigger
10t配重块+15t配重块+9m臂头固定段+左前支腿+右前支腿

59t




15t counterweight block × 2
15t配重块×2

30t



15t counterweight block × 2 + left mast
15t配重块×2+左桅杆

31.5t




10t counterweight block × 3 + right mast
10t配重块×3+右桅杆

31.5t



Counterweight rack + tray
配重挂架+托盘

29.2t



10t counterweight block × 2 + 15t
counterweight block
10t配重块×2+15t配重块

35t

On-Site Heavy-Duty Driving Solutions

重载转场图

■ Plain Area Transfer 平原转场

Capable of transporting with boom, luffing cylinder, turntable, main winch, front and rear outriggers, and superlift for quick transfers.

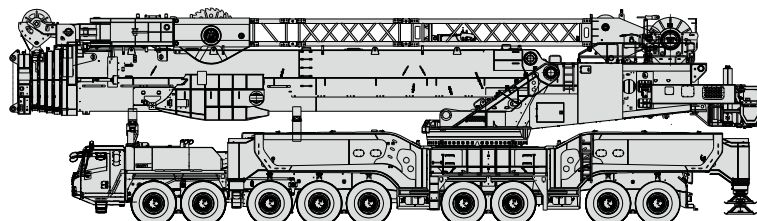
可带6节主臂，变幅油缸，转台，主卷扬，前后支腿、超起快速转场。

5km/h

Maximum speed
最大时速

411t

Total machine weight
整机总重



■ Mountainous Area Transfer (with boom) 山地转场(带臂方案)

Capable of transporting with boom, luffing cylinder, turntable, main winch, and front and rear outriggers.

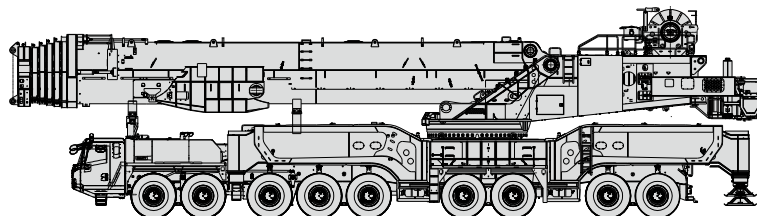
可带6节主臂，变幅油缸，转台，主卷扬，前后支腿转场。

10km/h

Maximum speed
最大时速

357t

Total machine weight
整机总重



■ Mountainous Area Transfer (without Boom) 平原转场

Includes outriggers, turntable (stewing 180°), and operator's cab.

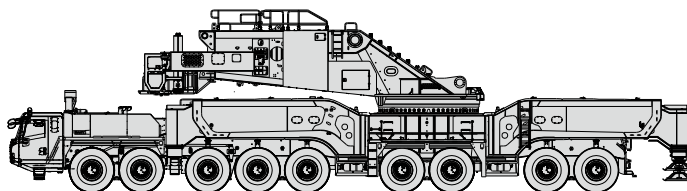
带支腿、转台(回转180°)、操纵室。

60km/h

Maximum speed
最大时速







181t

Total machine weight
整机总重









Transport Dimensions

部件运输尺寸

ITEM 物料名称		SKETCH 形状	L×W×H (m) 长×宽×高(m)	SINGLE PIECE WEIGHT 单件重量(t)	QTY. 数量
CHASSIS 底盘	Basic machine 重量参数		22.1×3.6×2.7	78.4	1
	Left front outrigger 左前支腿		7.11×1.16×2.55	13.5	1
	Right front outrigger 右前支腿		7.11×1.16×2.55	13.5	1
	Left rear outrigger 左后支腿		7.11×1.16×2.55	13.5	1
	Right rear outrigger 右后支腿		7.11×1.16×2.55	13.5	1
	Outrigger plate (optional dual outrigger plate) 支腿盘(可选配双支腿盘)		1.06×1.06×0.36	0.25	4
	Outrigger pad (optional 6m×2.3m×0.3m outrigger pad) 支腿垫板(可选配6m×2.3m×0.3m 支腿垫板)		5×3×0.3	3.92	1
TURNTABLE 转台	Turntable body 转台体		12×3.7×3.4	50	1







Transport Dimensions

部件运输尺寸

ITEM 物料名称		SKETCH 形状	L×W×H (m) 长×宽×高(m)	SINGLE PIECE WEIGHT 单件重量(t)	QTY. 数量
TURNTABLE 转台	Main winch 主卷扬		2.58×2.5×1.65	16.95	1
	Auxiliary winch 副卷扬		3.29×1.9×1.65	16.5	1
	400t hook 400t起重钩		4.22×1.69×1.3	16	1
	Left luffing cylinder 左变幅油缸		7.2×0.95×1.25	17.1	1
	Right luffing cylinder 右变幅油缸		7.2×0.95×1.25	17.1	1
	Counterweight rack 配重挂架		3.16×2.65×1.87	5	1







Transport Dimensions

部件运输尺寸

	ITEM 物料名称	SKETCH 形状	L×W×H (m) 长×宽×高(m)	SINGLE PIECE WEIGHT 单件重量(t)	QTY. 数量
TURNTABLE 转台	Counterweight tray 配重托盘		7.8×1.98×0.78	24	1
	15t counterweight block 15t 配重块		3.75×2.36×0.5	15	10
	10t counterweight block 10t 配重块		3.75×2.36×0.5	10	20
BOOM 吊臂	1st and 2nd section boom + telescoping cylinder 一节臂+二节臂+伸缩油缸		17.94×3.56×3.59	63	1
	3rd, 4th, 5th and 6th section boom 三、四、五、六节臂		17.68×3.55×3.36	67	1
SUPERLIFT DEVICE 超起装置	Left superlift 左超起		18.47×2.28×3.2	28	1





Transport Dimensions

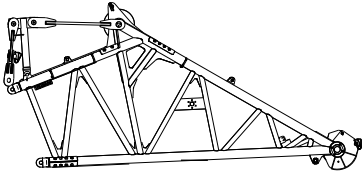部件运输尺寸

ITEM 物料名称		SKETCH 形状	L×W×H (m) 长×宽×高(m)	SINGLE PIECE WEIGHT 单件重量(t)	QTY. 数量
SUPERLIFT DEVICE 超起装置	Right superlift 右超起		18.47×2.28×3.2	28	1
	4m standard section 4m标准节		4.2×1.22×1.04	0.92	2
WIND POWER JIB ASSEMBLY 风电副臂	3m boom and jib connecting support 3m主副臂连接架		3.40×3.51×3.45	4.28	1
	10m reinforcing section 10m加强节		10.25×3.51×3.27	5.27	1
	6m large section jib 6m大截面副臂		6.25×3.55×3.38	3.94	1
	9m jib head rotating section 9m臂头旋转段		6.74×3.5×3.6	3.56	1



Transport Dimensions

部件运输尺寸

ITEM 物料名称		SKETCH 形状	L×W×H (m) 长×宽×高(m)	SINGLE PIECE WEIGHT 单件重量(t)	QTY. 数量
WIND POWER JIB ASSEMBLY 风电副臂	9m fixed jib head section 9m臂头固定段		3.75×3.71×3.5	6.73	1
	12m reinforcing section 12m加强节		12.25×3.51×3.31	5.99	1
	12m superlift connecting support 12m超起连接架		12.25×3.55×3.22	8.4	1
	Left mast 左桅杆		10.88×1.45×0.69	1.55	1
	Right mast 右桅杆		10.88×1.45×0.69	1.55	1
	12m large section jib 12m大截面副臂		12.25×3.53×3.33	6.31	4

Transport Dimensions

部件运输尺寸

ITEM 物料名称		SKETCH 形状	L×W×H (m) 长×宽×高(m)	SINGLE PIECE WEIGHT 单件重量(t)	QTY. 数量
WIND POWER JIB ASSEMBLY 风电副臂	Light-duty 12m jib 12m轻型副臂		12.25×3.53×3.38	5.71	2
	Light-duty 9m boom head 9m轻型臂头		9.69×3.42×6.03	5.78	1

Crane Introduction

整机介绍

Superstructure 上车



Operator's cab 操纵室

- Located on one side of the turntable, the entire frame is made of corrosion-resistant steel plates with full coverage.
- Soft interior upholstery and adjustable seats.
- Adjustable operator's cab platform.
- 置于转台一侧，整体框架由耐腐蚀钢板制成，配置全覆盖；
- 软包内饰、可调节式座椅；
- 可升降操纵室平台。



Hydraulics 液压系统

- Utilizes load sensor control and constant power axial piston variable pump.
- Enables speed proportional adjustment and power adaptive adjustment. The pump automatically adjusts according to load changes, optimizing power usage. Speed control does not rely on throttling, reducing energy waste.
- 采用负荷传感器控制加恒功率控制轴向柱塞变量泵；
- 能实现速度比例调节和功率适应调节，随负载变化自动调节油泵，合理利用功率，且速度控制不依靠节流实现，减少了能量浪费。



Superlift device 超起系统

- Adopts fixed-length tensioning technology, active boom posture control technology, and variable length technology.
- 采用定长张紧技术，臂架姿态主动控制技术，可变长度技术。



Luffing system 变幅系统

- Boom luffing is controlled by an electronic proportional balance valve.
- 通过电比例变幅平衡阀控制变幅落。



Boom system 吊臂系统

- Extra-large cross-section telescopic boom with dual-side boom pin design ensures reliability in wind power lifting.
- 超大截面伸缩臂，双侧臂销设计，保证风电吊装可靠性。



Superstructure engine 上车发动机

- WEICHAI WP17T engine.
- Rated power/speed: 566kW/1900rpm.
- 潍柴WP17T发动机；
- 额定功率/转速：566kW/1900rpm。



Slewing 回转系统

- Maximum slewing speed: 0.5 rpm.
- 最大回转速度0.5rpm。



Hoist 起升机构

- Variable displacement piston motor, hydraulic braking system with balance valve, single rope maximum speed 130 m/min, lifting wire rope length: 1400m.
- 变量柱塞马达，液压制动系统，装有平衡阀；单绳最大速度130m/min，起升钢丝绳长1400m。



Safety equipment 安全装置

- Hydraulic balance valve, hydraulic relief valve, hydraulic bidirectional lock, torque limiter.
- Three-ring protector to prevent prevent over-hoist-down of the wire rope.
- Boom head height limit setting to prevent the wire rope from over winding.
- Anemometer to measure high-altitude wind speed.
- Emergency winch drum for boom pin: Quickly resolves issues with boom extension.
- Emergency winch system: Solves problems with suspended loads that cannot descend.
- AI winch rope management system: Provides early warning to reduce the risk of wire rope damage.
- Intelligent steering system: Precise steering with zero deviation.
- 液压平衡阀、液压溢流阀、液压双向锁、力矩限制器；
- 三圈保护器，防止钢丝绳过放；
- 臂头设置高度限位，防止钢丝绳过卷；
- 风速仪，检测高空风速；
- 缸臂销应急卷筒：快速解决无法伸臂问题；
- 卷扬应急系统：解决吊载悬空无法下落的问题；
- AI卷扬乱绳系统：提前预警，减少钢丝绳损坏风险；
- 智能转向系统：转向精准零偏差。



Counterweight 配重

- 350t movable counterweight.
- 350t活动配重。

Crane Introduction

整机介绍

Carrier 下车



Driver's cab驾驶室

- Newly designed cab with air suspension.
- 全新驾驶室，空气悬挂。



Carrier frame车架

- Constructed from high-strength steel plates through integral welding.
- 选用高强度板整体焊接而成。



Axle 车桥

- Newly developed 3.6m wide custom axles.
- 全新开发3.6m宽定制车桥。



Chassis engine底盘发动机

- Model: WEICHAI WP17TG770E304.
- Rated Power: 566 kW / 1900 rpm, water-cooled, turbocharged intercooler, diesel engine.
- Emission standard: Euro III standards.
- Fuel reservoir capacity: 300L.
- 发动机型号：潍柴 WP17TG770E304；
- 额定功率：566kW/1900rpm、水冷却、增压中冷、柴油发动机；
- 环保性：排放符合国三标准；
- 燃料箱有效容积：300L。



Outrigger支腿

- X-shaped layout, with independent assembly & disassembly and transport.
- X 放射形形式布置支腿，具有独立支腿方便拆卸及运输。



Transmission变速箱

- ZF 12-speed synchronizer transmission, with end face gear structure and universal joints capable of handling higher torque output.
- ZF 全同步器 12 档变速箱，端面齿结构传动轴万向节可承受更高扭矩输出。



Brake制动系统

- Multiple braking system combinations: service brakes, parking brakes, engine braking, and transmission retarder braking.
- Electric eddy current braking, external air compressor, with 36 air chambers.
- 多种制动系统组合：行车制动、驻车制动、发动机制动、变速箱缓速制动；
- 电涡流制动，外置空压机，气室数量增至36个。



Suspension system悬挂系统

- Height-adjustable pneumatic suspension system with hydraulic locking, cylinder stroke of -170mm to 130mm.
- 高度可调带液压闭锁的油气悬架系统，油缸行程 -170mm~130mm。



Steering转向系统

- All-wheel steering.
- 全轮转向。



Wheel formula车轮模式

- 18×16×18.



Electrical system电气系统

- 24V DC power supply integrated with a CAN bus control system.
- 24V直流电源匹配CAN总线控制系统。

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	124m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
20.0	158.6	158.8	165.0	164.9	169.7	166.7	175.3	176.1	179.4	180.7	174.9	181.9	190.0	193.4	195.3	20.0
21.0	154.6	154.8	161.1	162.4	166.4	163.0	173.3	174.0	177.7	179.4	171.5	178.8	187.7	192.1	192.2	21.0
22.0	150.6	150.8	157.1	159.9	163.1	159.3	171.2	171.8	175.9	178.1	168.1	175.8	185.5	190.6	189.0	22.0
24.0	145.2	146.3	149.0	151.7	154.8	154.3	163.4	167.1	169.6	172.4	163.7	172.3	180.6	186.2	186.7	24.0
26.0	138.2	138.3	144.5	146.5	150.2	149.2	158.6	162.1	162.3	165.0	158.9	164.2	175.8	181.5	182.6	26.0
27.0	134.5	136.1	142.2	144.3	148.0	147.7	156.0	159.6	160.5	162.6	156.2	163.4	172.1	178.8	179.7	27.0
28.0	130.9	133.8	140.0	142.0	145.7	146.3	153.3	157.1	158.6	160.3	153.5	162.6	168.3	177.8	178.6	28.0
30.0	126.6	129.0	134.5	135.0	136.3	136.4	148.1	149.0	152.9	154.6	148.8	156.2	164.5	171.5	167.3	30.0
32.0	121.7	123.9	126.7	128.2	135.5	132.0	138.3	144.4	148.5	150.1	143.7	151.7	158.1	155.4	154.4	32.0
34.0	116.6	118.7	123.9	125.3	130.3	129.7	134.1	137.3	144.0	145.2	137.2	147.2	144.5	145.4	139.6	34.0
36.0	109.9	112.0	116.9	120.2	125.1	122.4	130.9	131.6	133.9	132.9	132.0	135.0	132.9	131.0	130.1	36.0
38.0	105.5	107.4	113.9	117.0	121.7	119.2	123.6	122.0	124.2	123.3	126.9	124.8	123.3	121.7	121.2	38.0
40.0	100.7	104.2	108.9	108.9	116.9	114.5	114.1	110.4	116.7	111.6	119.3	115.3	110.7	110.7	109.8	40.0
42.0	96.8	100.2	104.6	105.8	108.0	109.4	103.7	103.6	105.5	104.7	109.1	105.0	104.7	102.2	101.3	42.0
44.0	93.7	97.0	99.6	99.1	102.2	103.6	98.1	98.0	99.8	97.4	103.1	98.6	96.5	95.9	95.9	44.0
46.0	90.2	91.8	94.3	93.8	95.7	97.0	92.0	90.3	92.0	91.3	96.7	92.3	90.5	89.2	88.3	46.0
48.0	87.1	85.9	88.3	87.8	89.6	90.8	83.0	81.5	83.1	82.4	90.5	87.5	82.6	80.6	79.8	48.0
50.0	80.3	79.1	81.4	79.1	84.9	86.0	78.7	77.2	78.7	78.1	82.7	78.9	77.3	75.5	75.7	50.0
52.0	76.1	75.0	77.0	75.1	78.1	79.3	73.5	73.4	74.8	73.1	77.3	73.9	73.4	71.6	70.8	52.0
54.0	72.2	70.0	72.0	71.2	73.0	74.1	68.8	69.7	69.9	68.3	73.4	70.0	68.6	67.0	66.2	54.0
56.0	67.4	66.4	68.3	66.5	69.3	71.4	65.3	65.1	66.3	65.9	69.7	65.5	64.1	63.5	62.9	56.0
58.0	65.0	63.0	64.8	64.1	65.7	66.6	61.8	60.7	61.8	61.4	66.2	62.0	60.8	59.2	58.6	58.0
60.0	60.5	59.6	61.4	59.7	62.2	63.2	55.0	54.9	55.9	54.6	61.7	58.9	54.2	52.8	52.3	60.0
	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
 4#	0	0	45	0	45	45	0	0	90	45	45	100	90	100	100	4# 
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	124m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
20.0	192.4														20.0
21.0	190.4														21.0
22.0	188.4	200.0	200.0	200.0											22.0
24.0	185.8	200.0	200.0	200.0	200.0	200.0	200.0	200.0							24.0
26.0	181.2	200.0	200.0	200.0	200.0	200.0	200.0	200.0							26.0
27.0	178.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0							27.0
28.0	174.9	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	195.0	190.0	188.2	28.0
30.0	170.2	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	200.0	195.2	190.3	188.4	180.0	30.0
32.0	158.5	174.2	174.2	174.2	174.2	174.2	174.2	174.2	174.2	174.2	174.2	173.7	173.4	172.8	32.0
34.0	147.2	162.0	162.0	162.0	162.0	162.0	162.0	162.0	162.0	161.1	161.1	160.7	160.5	160.2	34.0
36.0	134.1	149.2	149.1	149.0	149.0	148.9	148.8	148.7	148.6	148.5	148.4	147.8	147.7	147.6	36.0
38.0	124.9	137.9	137.9	137.9	137.9	137.9	137.9	137.9	137.9	137.0	137.0	137.0	137.0	136.9	38.0
40.0	115.3	110.0	115.2	115.4	109.6	110.3	109.8	108.6	108.8	107.7	107.2	105.8	105.9	103.5	40.0
42.0	104.2	102.2	104.2	104.4	103.7	102.3	101.7	101.3	101.4	100.4	99.9	98.5	96.7	96.5	42.0
44.0	98.6	95.9	98.6	96.3	95.6	96.9	94.6	93.5	94.1	93.1	92.7	91.9	91.9	89.8	44.0
46.0	90.9	89.9	90.9	88.7	90.5	89.4	88.8	87.8	88.3	83.3	82.8	82.2	81.8	79.7	46.0
48.0	86.1	81.2	86.2	81.1	82.0	79.5	78.9	80.4	79.7	78.9	78.5	77.9	76.1	75.5	48.0
50.0	77.9	76.1	77.9	76.1	75.4	75.3	74.9	74.0	74.7	72.7	72.3	71.8	71.4	69.5	50.0
52.0	72.8	71.1	72.9	72.1	71.6	70.7	70.1	69.3	69.9	68.0	67.7	67.2	66.9	66.0	52.0
54.0	69.1	67.5	69.2	67.5	67.0	66.1	66.6	65.8	65.3	64.6	64.3	63.9	63.5	62.2	54.0
56.0	64.6	63.1	64.7	63.1	62.6	62.7	62.3	61.5	62.1	60.4	55.5	54.3	52.7	53.5	56.0
58.0	61.3	55.4	60.4	59.9	59.4	55.1	54.7	54.0	53.6	53.1	51.9	50.8	49.3	48.1	58.0
60.0	54.6	53.5	54.8	52.6	53.0	51.5	52.0	51.4	51.8	50.4	49.3	48.2	46.9	45.7	60.0
	10	10	10	10	10	10	10	10	10	10	10	10	10	10	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
 4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	 4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
 m/s	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	8.3	 m/s

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	106m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
16																16
18																18
20	176.2	176.4	183.3	183.2	188.6	185.2	194.8	195.7	199.3	200.8	194.3	202.1	211.1	214.9	217.0	20
21	171.8	172.0	179.0	180.5	184.9	181.1	192.5	193.3	197.4	199.4	190.6	198.7	208.6	213.4	213.5	21
22	167.3	167.5	174.6	177.7	181.2	177.0	190.2	190.9	195.4	197.9	186.8	195.3	206.1	211.8	210.0	22
24	161.3	162.5	165.6	168.6	172.0	171.4	181.6	185.7	188.4	191.5	181.9	191.4	200.7	206.9	207.4	24
26	153.5	153.7	160.5	162.8	166.9	165.8	176.2	180.1	180.3	183.3	176.5	182.4	195.3	201.7	202.9	26
27	149.5	151.2	158.1	160.3	164.4	164.2	173.3	177.3	178.3	180.7	173.5	181.6	191.2	198.7	199.7	27
28	145.4	148.7	155.6	157.8	161.9	162.5	170.3	174.5	176.2	178.1	170.5	180.7	187.0	197.6	198.4	28
30	140.7	143.3	149.4	150.0	151.4	151.6	164.5	165.5	169.9	171.8	165.3	173.6	182.8	190.5	185.9	30
32	135.2	137.7	140.8	142.4	150.6	146.7	153.7	160.4	165.0	166.8	159.7	168.5	175.7	172.7	171.5	32
34	129.5	131.9	137.7	139.2	144.8	144.1	149.0	152.5	160.0	161.3	152.4	163.5	160.5	161.6	155.1	34
36	122.1	124.4	129.9	133.6	139.0	136.0	145.4	146.2	148.8	147.7	146.7	150.0	147.7	145.6	144.5	36
38	117.2	119.3	126.5	130.0	135.2	132.4	137.3	135.6	138.0	137.0	141.0	138.7	137.0	135.2	134.7	38
40	111.9	115.8	121.0	121.0	129.9	127.2	126.8	122.7	129.7	124.0	132.5	128.1	123.0	123.0	122.0	40
42	107.5	111.3	116.2	117.5	120.0	121.6	115.2	115.1	117.2	116.3	121.2	116.7	116.3	113.5	112.6	42
44	104.1	107.8	110.7	110.1	113.5	115.1	109.0	108.9	110.9	108.2	114.6	109.5	107.2	106.5	106.6	44
46	100.2	102.0	104.8	104.2	106.3	107.8	102.2	100.3	102.2	101.4	107.4	102.6	100.5	99.1	98.1	46
48	96.8	95.4	98.1	97.5	99.5	100.9	92.2	90.6	92.3	91.6	100.5	97.2	91.8	89.6	88.7	48
50	89.2	87.9	90.4	87.9	94.3	95.6	87.4	85.8	87.4	86.8	91.9	87.7	85.9	83.9	84.1	50
52	84.5	83.3	85.6	83.4	86.8	88.1	81.7	81.6	83.1	81.2	85.9	82.1	81.5	79.5	78.7	52
54	80.2	77.8	80.0	79.1	81.1	82.3	76.4	77.4	77.7	75.9	81.6	77.8	76.2	74.4	73.6	54
56	74.9	73.8	75.9	73.9	77.0	79.3	72.5	72.3	73.7	73.2	77.4	72.8	71.2	70.6	69.9	56
58	72.2	70.0	72.0	71.2	73.0	74.0	68.7	67.4	68.7	68.2	73.5	68.9	67.6	65.8	65.1	58
60	67.2	66.2	68.2	66.3	69.1	70.2	61.1	61.0	62.1	60.7	68.5	65.4	60.2	58.7	58.1	60
	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
4#	0	0	45	0	45	45	0	0	90	45	45	100	90	100	100	4#
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	106m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
16															16
18															18
20	213.8														20
21	211.6														21
22	209.3	235.5	235.5	235.5											22
24	206.4	230.0	230.9	230.3	232.5	238.4	238.8	240.2							24
26	201.3	230.9	231.9	230.9	230.0	230.8	230.5	230.3							26
27	197.8	230.7	231.0	230.1	230.4	230.1	230.8	230.6							27
28	194.3	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0	230.0	28
30	189.1	210.6	210.6	210.6	210.6	210.6	210.6	210.6	210.6	210.6	210.3	210.1	210.0	210.0	30
32	176.1	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.6	193.0	192.7	192.0	32
34	163.6	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	179.0	179.0	178.6	178.3	178.0	34
36	149.0	165.8	165.7	165.6	165.5	165.4	165.3	165.2	165.1	165.0	164.9	164.2	164.1	164.0	36
38	138.8	153.2	153.2	153.2	153.2	153.2	153.2	153.2	153.2	152.2	152.2	152.2	152.2	152.1	38
40	128.1	122.2	128.0	128.2	121.8	122.6	122.0	120.7	120.9	119.7	119.1	117.5	117.7	115.0	40
42	115.8	113.5	115.8	116.0	115.2	113.7	113.0	112.6	112.7	111.5	111.0	109.4	107.4	107.2	42
44	109.6	106.6	109.6	107.0	106.2	107.7	105.1	103.9	104.5	103.4	103.0	102.1	102.1	99.8	44
46	101.0	99.9	101.0	98.5	100.6	99.3	98.7	97.6	98.1	92.5	92.0	91.3	90.9	88.5	46
48	95.7	90.2	95.8	90.1	91.1	88.3	87.7	89.3	88.6	87.7	87.2	86.6	84.6	83.9	48
50	86.5	84.5	86.6	84.5	83.8	83.7	83.2	82.2	83.0	80.8	80.3	79.8	79.3	77.2	50
52	80.9	79.0	81.0	80.1	79.5	78.5	77.9	77.0	77.7	75.6	75.2	74.7	74.3	73.3	52
54	76.8	75.0	76.9	75.0	74.4	73.4	74.0	73.1	72.5	71.8	71.4	71.0	70.5	69.1	54
56	71.8	70.1	71.9	70.1	69.5	69.7	69.2	68.3	69.0	67.1	61.7	60.3	58.6	59.4	56
58	68.1	61.5	67.1	66.5	66.0	61.2	60.8	60.0	59.6	59.0	57.7	56.4	54.8	53.4	58
60	60.7	59.4	60.9	58.4	58.9	57.2	57.8	57.1	57.6	56.0	54.8	53.6	52.1	50.8	60
	10	10	10	10	10	10	10	10	10	10	10	10	10	10	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	100m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
16	196.1	196.3	203.4	203.9												16
18	185.4	185.0	189.9	190.4	197.9	196.7	203.7	199.3	205.8	207.8	202.9	209.2				18
20	176.2	176.4	183.3	183.2	188.6	185.2	194.8	195.7	199.3	200.8	194.3	202.1	211.1	214.9	217.0	20
21	171.8	172.0	179.0	180.5	184.9	181.1	192.5	193.3	197.4	199.4	190.6	198.7	208.6	213.4	213.5	21
22	167.3	167.5	174.6	177.7	181.2	177.0	190.2	190.9	195.4	197.9	186.8	195.3	206.1	211.8	210.0	22
24	161.3	162.5	165.6	168.6	172.0	171.4	181.6	185.7	188.4	191.5	181.9	191.4	200.7	206.9	207.4	24
26	161.4	164.4	170.4	173.1	178.1	175.2	191.9	191.8	192.5	198.7	189.1	200.8	213.7	222.2	225.0	26
27	158.4	162.5	168.6	171.0	175.1	172.3	187.1	189.0	191.7	196.0	184.8	198.0	209.5	216.2	220.2	27
28	155.3	160.6	166.8	168.8	172.0	169.3	182.2	186.2	190.8	193.2	180.5	195.2	205.3	210.2	215.4	28
30	148.5	151.2	161.3	163.3	166.1	163.5	176.5	177.2	185.6	186.9	175.1	189.1	198.8	204.2	205.0	30
32	145.2	147.8	149.5	156.4	160.9	158.0	170.4	175.3	179.5	178.0	172.8	180.1	186.9	189.5	183.7	32
34	136.8	141.6	146.0	150.3	154.8	152.0	163.5	168.1	175.2	173.3	164.0	174.7	172.1	173.6	171.0	34
36	133.2	135.5	140.1	144.2	148.5	148.5	159.6	161.2	165.2	163.5	152.2	162.3	160.3	159.1	155.7	36
38	117.2	119.3	126.5	130.0	135.2	132.4	137.3	135.6	138.0	137.0	141.0	138.7	137.0	135.2	134.7	38
40	111.9	115.8	121.0	121.0	129.9	127.2	126.8	122.7	129.7	124.0	132.5	128.1	123.0	123.0	122.0	40
42	107.5	111.3	116.2	117.5	120.0	121.6	115.2	115.1	117.2	116.3	121.2	116.7	116.3	113.5	112.6	42
44	104.1	107.8	110.7	110.1	113.5	115.1	109.0	108.9	110.9	108.2	114.6	109.5	107.2	106.5	106.6	44
46	100.2	102.0	104.8	104.2	106.3	107.8	102.2	100.3	102.2	101.4	107.4	102.6	100.5	99.1	98.1	46
48	96.8	95.4	98.1	97.5	99.5	100.9	92.2	90.6	92.3	91.6	100.5	97.2	91.8	89.6	88.7	48
50	89.2	87.9	90.4	87.9	94.3	95.6	87.4	85.8	87.4	86.8	91.9	87.7	85.9	83.9	84.1	50
52	84.5	83.3	85.6	83.4	86.8	88.1	81.7	81.6	83.1	81.2	85.9	82.1	81.5	79.5	78.7	52
54	80.2	77.8	80.0	79.1	81.1	82.3	76.4	77.4	77.7	75.9	81.6	77.8	76.2	74.4	73.6	54
56	74.9	73.8	75.9	73.9	77.0	79.3	72.5	72.3	73.7	73.2	77.4	72.8	71.2	70.6	69.9	56
58	72.2	70.0	72.0	71.2	73.0	74.0	68.7	67.4	68.7	68.2	73.5	68.9	67.6	65.8	65.1	58
60	67.2	66.2	68.2	66.3	69.1	70.2	61.1	61.0	62.1	60.7	68.5	65.4	60.2	58.7	58.1	60
	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
4#	0	0	45	0	45	45	0	0	90	45	45	100	90	100	100	4#
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	100m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
16															16
18															18
20	213.8														20
21	211.6														21
22	209.3	238.3	238.3	238.2											22
24	206.4	238.3	238.3	238.2	238.5	238.4	238.8	240.2							24
26	221.6	238.3	238.3	238.2	238.5	238.2	237.9	237.7	236.5	237.9	237.7	237.5	237.4	237.3	26
27	215.5	231.0	231.0	231.0	231.0	231.0	231.0	231.0	231.0	231.0	231.0	231.0	230.9	230.8	27
28	209.3	231.0	231.0	231.0	231.0	231.0	231.0	231.0	231.0	231.0	231.0	230.8	230.8	230.5	28
30	199.1	211.0	211.0	211.0	211.0	211.0	211.0	211.0	211.0	211.0	211.0	211.0	210.6	210.6	30
32	189.3	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	193.0	192.8	32
34	174.4	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	179.0	178.9	34
36	162.4	164.8	164.8	164.8	164.8	164.8	164.8	164.8	164.8	164.8	164.8	164.8	164.8	164.5	36
38	138.8	153.0	153.0	153.0	153.0	153.0	153.0	153.0	153.0	153.0	153.0	153.0	153.0	152.8	38
40	128.1	122.2	128.0	128.2	121.8	122.6	122.0	120.7	120.9	119.7	119.1	117.5	117.7	115.0	40
42	115.8	113.5	115.8	116.0	115.2	113.7	113.0	112.6	112.7	111.5	111.0	109.4	107.4	107.2	42
44	109.6	106.6	109.6	107.0	106.2	107.7	105.1	103.9	104.5	103.4	103.0	102.1	102.1	99.8	44
46	101.0	99.9	101.0	98.5	100.6	99.3	98.7	97.6	98.1	92.5	92.0	91.3	90.9	88.5	46
48	95.7	90.2	95.8	90.1	91.1	88.3	87.7	89.3	88.6	87.7	87.2	86.6	84.6	83.9	48
50	86.5	84.5	86.6	84.5	83.8	83.7	83.2	82.2	83.0	80.8	80.3	79.8	79.3	77.2	50
52	80.9	79.0	81.0	80.1	79.5	78.5	77.9	77.0	77.7	75.6	75.2	74.7	74.3	73.3	52
54	76.8	75.0	76.9	75.0	74.4	73.4	74.0	73.1	72.5	71.8	71.4	71.0	70.5	69.1	54
56	71.8	70.1	71.9	70.1	69.5	69.7	69.2	68.3	69.0	67.1	61.7	60.3	58.6	59.4	56
58	68.1	61.5	67.1	66.5	66.0	61.2	60.8	60.0	59.6	59.0	57.7	56.4	54.8	53.4	58
60	60.7	59.4	60.9	58.4	58.9	57.2	57.8	57.1	57.6	56.0	54.8	53.6	52.1	50.8	60
	10	10	10	10	10	10	10	10	10	10	10	10	10	10	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	94m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
16	215.8	220.7	222.4	224.7	228.6	226.2	235.4	236.4	237.3	240.2	235.7	242.3				16
18	204.7	205.1	214.3	216.5	218.4	222.8	229.4	233.6	238.7	235.2	230.8	237.9	251.2	256.7	256.6	18
20	199.0	199.5	204.2	210.1	210.2	208.3	219.4	226.8	231.2	234.8	220.9	231.1	246.7	253.1	253.9	20
21	192.2	196.2	201.0	204.7	207.1	205.3	216.7	221.1	228.0	231.5	218.3	230.9	244.6	251.7	254.0	21
22	185.4	192.8	197.8	199.2	203.9	202.3	214.0	215.4	224.8	228.2	215.6	230.6	242.4	250.2	254.1	22
24	179.3	182.9	191.6	192.9	197.8	196.4	211.3	210.0	218.6	222.0	209.1	224.1	233.0	246.4	253.1	24
26	173.5	176.9	182.5	183.8	191.2	186.5	204.8	203.4	212.9	216.2	206.4	218.2	231.4	237.8	237.6	26
27	169.0	174.0	179.4	180.9	186.8	184.7	201.3	202.7	209.5	213.1	203.2	217.1	225.1	232.0	232.1	27
28	164.5	171.1	176.2	178.0	182.3	182.8	197.8	202.0	206.0	209.9	200.0	215.9	218.8	226.1	226.5	28
30	161.1	167.5	169.9	175.2	176.7	176.8	195.1	197.4	200.0	203.7	189.6	204.7	207.7	211.3	213.8	30
32	154.2	160.3	168.9	167.8	173.9	169.4	186.6	190.2	189.8	193.3	176.9	194.2	197.1	200.7	202.2	32
34	150.4	153.8	161.7	163.9	166.9	162.7	179.0	183.2	180.0	180.0	166.9	180.8	184.1	184.7	188.4	34
36	144.2	147.4	155.2	157.2	157.3	151.1	171.5	172.4	172.6	172.5	160.2	173.7	172.5	171.2	168.1	36
38	137.8	143.2	148.6	145.9	145.6	144.6	161.8	162.6	162.9	162.8	148.4	163.5	159.3	160.2	158.7	38
40	132.3	137.4	141.8	147.1	139.9	138.0	149.6	148.5	150.6	147.1	142.6	149.1	148.2	146.5	144.9	40
42	130.3	133.2	134.0	140.3	133.5	130.4	137.9	136.9	138.8	137.9	136.1	141.0	136.7	135.1	133.6	42
44	125.2	128.0	127.6	131.4	123.1	120.4	130.4	129.4	131.2	130.4	130.9	129.9	128.2	127.8	121.7	44
46	119.3	119.9	118.9	122.4	118.4	115.8	119.0	118.1	121.1	117.6	120.8	119.8	115.5	115.4	114.0	46
48	115.1	112.1	113.1	114.5	112.6	110.2	111.3	110.4	111.4	110.0	112.8	111.6	109.4	108.0	106.7	48
50	109.0	106.1	109.1	107.0	108.4	106.4	105.4	104.6	105.5	104.2	105.5	104.4	102.3	102.3	101.1	50
52	101.8	100.7	103.4	101.4	102.8	99.8	98.5	97.7	100.2	99.0	100.1	99.2	95.6	92.3	91.2	52
54	96.5	92.6	98.1	96.2	96.2	94.2	90.6	88.5	90.2	89.2	91.8	89.3	89.4	86.2	85.2	54
56	88.6	86.3	90.1	88.4	90.3	87.8	84.5	85.3	87.0	84.6	86.5	86.1	83.5	81.8	82.2	56
58	85.4	81.8	85.3	82.4	84.8	80.8	80.2	79.6	81.2	80.2	80.5	80.3	79.1	77.7	76.7	58
60	80.8	77.5	79.5	79.4	77.6	75.1	76.0	75.4	76.9	76.0	75.1	76.1	75.1	73.6	71.6	60
	10	10	10	10	10	10	10	10	10	10	10	10	10	10	10	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
4#	0	0	45	0	45	45	0	0	90	45	45	100	90	100	100	4#
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	94m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
16															16
18	252.2														18
20	249.2	262.7	260.8												20
21	248.0	263.9	261.7												21
22	246.8	265.0	262.5	274.5	275.4	276.6									22
24	243.4	248.6	252.5	261.9	262.1	264.5	265.3	266.7	263.2	267.6	266.3				24
26	230.8	237.4	241.1	248.4	249.8	249.4	249.2	249.0	249.6	249.3	249.0	248.8	248.7	248.7	26
27	224.7	231.4	235.5	240.8	241.1	240.7	240.5	240.3	240.9	240.6	240.3	240.1	240.0	240.0	27
28	218.6	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	232.0	28
30	207.6	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	211.5	211.0	30
32	197.2	199.7	196.6	196.1	196.4	196.0	195.7	195.5	196.2	194.0	194.0	194.0	193.5	193.0	32
34	186.1	183.6	182.7	182.1	182.5	182.1	181.8	181.6	181.0	180.0	180.0	180.0	180.0	179.0	34
36	173.7	171.3	170.2	169.7	170.0	169.6	169.3	168.2	167.2	167.0	167.0	167.0	167.0	166.0	36
38	162.4	159.4	158.9	155.7	158.7	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	154.0	38
40	149.0	145.4	148.2	147.2	146.9	144.1	141.8	142.3	141.5	139.8	137.4	133.8	128.9	122.4	40
42	138.4	133.9	136.6	135.8	135.4	132.8	134.2	131.1	130.3	132.3	122.3	116.9	115.5	112.7	42
44	129.8	126.7	126.3	122.7	126.2	125.7	121.2	119.4	120.2	117.2	115.8	110.7	107.1	105.8	44
46	117.1	114.2	116.8	116.2	115.7	113.4	113.7	112.0	112.7	109.9	106.6	103.9	100.5	99.4	46
48	110.9	106.9	108.8	108.2	108.3	106.2	105.8	104.9	105.5	104.1	99.9	91.0	90.6	90.3	48
50	103.8	101.3	101.1	100.1	100.9	100.5	99.1	99.4	100.0	91.1	87.5	86.4	83.6	81.8	50
52	97.0	91.4	94.2	91.6	93.5	90.9	89.4	88.3	88.9	85.3	83.0	80.9	78.3	76.7	52
54	90.7	86.8	87.3	85.7	86.7	84.9	84.9	82.5	83.1	79.7	77.6	75.7	73.3	72.8	54
56	84.7	82.4	81.5	80.8	80.9	80.6	79.3	78.3	78.9	75.7	73.7	71.8	69.6	68.0	56
58	79.1	76.9	76.2	75.6	76.2	75.3	74.1	73.2	75.0	70.7	69.3	61.0	59.1	57.8	58
60	73.3	72.9	69.5	69.2	69.2	68.9	68.9	62.1	62.1	60.4	58.8	58.2	57.2	54.0	60
	10	10	10	10	10	10	10	10	10	10	10	10	10	10	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	88m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
14	235.4	237.0	241.1	248.1												14
16	226.2	228.4	236.8	239.5	241.2	240.9	253.1	259.1	260.9	256.2	254.0	258.7				16
18	215.8	218.6	225.4	227.2	236.4	233.8	242.2	246.9	255.1	259.5	243.3	253.9	265.8	275.1	275.5	18
20	208.0	211.4	223.9	220.4	229.4	227.9	235.2	241.3	244.4	252.9	241.1	249.2	264.0	274.5	279.6	20
21	204.6	208.0	218.4	217.5	225.4	222.2	232.0	237.9	241.4	247.3	237.6	246.8	261.7	274.1	277.8	21
22	201.2	204.5	212.8	214.5	221.4	216.4	228.8	234.5	238.4	241.6	234.0	244.3	259.4	273.6	275.9	22
24	190.8	197.9	205.7	207.4	214.7	209.7	222.3	232.0	235.7	239.6	227.0	243.1	254.1	263.2	266.4	24
26	187.5	190.9	198.9	200.5	207.8	203.1	220.6	225.1	229.2	236.6	220.1	236.2	243.4	249.6	249.5	26
27	183.2	187.6	195.7	199.2	204.2	199.6	217.3	224.2	225.9	230.7	215.0	232.4	237.5	239.4	239.3	27
28	178.9	184.3	192.4	197.9	200.5	196.1	214.0	223.2	222.6	224.7	209.8	228.5	230.3	229.9	229.8	28
30	175.0	180.3	185.3	189.4	193.9	193.1	207.9	215.5	209.4	213.8	195.5	213.3	213.1	212.6	212.5	30
32	167.4	172.4	180.9	186.0	182.8	179.4	200.2	200.3	198.3	199.1	188.5	198.0	197.8	197.4	197.3	32
34	166.2	167.9	173.3	178.3	172.4	168.9	186.9	186.7	184.7	185.5	174.9	184.4	184.2	183.8	183.7	34
36	159.3	163.5	163.3	173.6	162.6	161.7	174.7	174.5	172.5	173.3	167.9	172.2	172.0	171.6	171.5	36
38	152.2	156.2	153.5	163.8	153.2	150.3	163.7	163.5	161.5	162.3	159.7	161.2	161.0	160.6	160.5	38
40	146.0	149.9	145.0	154.0	146.2	143.5	153.8	153.6	151.6	152.4	149.3	151.3	151.1	150.6	150.5	40
42	141.4	147.0	138.2	145.4	140.4	135.6	144.7	144.5	142.5	143.3	140.7	142.2	142.0	141.5	141.5	42
44	133.7	138.7	132.8	137.1	133.7	131.4	136.5	136.2	134.2	135.0	131.8	133.9	133.7	133.3	133.2	44
46	129.2	130.3	126.3	128.5	125.3	123.0	127.8	127.5	124.8	126.1	122.5	124.7	124.6	124.0	123.8	46
48	121.3	121.9	118.2	120.0	117.0	114.6	119.3	119.1	116.6	117.6	114.1	116.2	116.1	115.6	115.0	48
50	113.6	114.2	111.7	112.3	109.2	106.9	111.6	111.3	108.8	110.0	106.4	108.6	108.5	107.9	107.6	50
52	106.5	107.1	104.6	105.3	102.2	99.9	104.6	104.4	101.9	103.0	99.5	101.6	101.4	100.9	100.6	52
54	100.1	100.6	98.2	98.6	95.8	93.4	98.2	97.8	95.3	96.5	93.1	95.1	94.9	94.5	94.3	54
56	94.1	94.6	92.2	92.8	89.9	87.5	92.2	92.0	89.5	90.6	87.1	89.2	89.1	88.5	87.2	56
58	88.6	89.2	86.7	87.3	84.3	82.0	86.5	85.9	84.0	85.1	81.6	83.7	83.6	83.0	82.7	58
60	80.2	80.8	78.7	79.2	76.7	74.3	78.9	78.8	76.5	77.6	74.2	76.4	76.4	76.0	75.9	60
	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
	2#	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
	3#	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
	4#	0	0	45	45	45	0	0	90	45	45	100	90	100	100	4#
	5#	45	0	45	45	45	90	100	90	90	45	90	90	100	100	5#
	6#	45	90	45	45	0	90	90	45	90	45	45	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	88m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
14															14
16															16
18	272.4														18
20	269.0	282.3	284.6	284.4	292.4	288.9									20
21	268.8	281.8	283.7	282.9	289.1	288.7									21
22	268.5	281.3	282.7	281.3	285.8	288.5	292.1	286.5	289.2						22
24	257.1	266.4	266.7	266.2	266.5	266.2	265.9	265.7	266.3	266.0	265.7	265.6	263.9	259.8	24
26	248.7	248.7	248.7	248.7	248.7	248.7	248.7	248.7	248.7	248.7	248.7	248.7	248.7	248.7	26
27	240.0	240.0	240.0	240.0	240.0	240.0	240.0	240.0	240.0	240.0	240.0	240.0	240.0	240.0	27
28	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	233.0	28
30	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	212.0	30
32	195.0	194.7	194.0	194.0	194.0	194.0	194.0	194.0	194.0	194.0	194.0	194.0	194.0	194.0	32
34	181.4	181.1	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	180.0	34
36	169.2	168.9	167.0	167.0	167.0	167.0	167.0	167.0	167.0	167.0	167.0	167.0	167.0	167.0	36
38	158.2	157.9	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	155.0	38
40	148.2	147.9	144.7	144.2	144.5	144.1	143.9	143.7	144.3	144.0	143.7	141.6	136.3	135.3	40
42	139.2	138.8	135.6	135.1	135.4	135.0	134.8	134.6	135.2	134.9	134.6	132.8	123.8	121.1	42
44	130.3	129.5	125.6	125.3	125.3	126.7	126.1	125.6	125.1	124.6	123.5	120.0	117.2	114.6	44
46	120.8	119.7	116.5	115.6	115.6	117.6	117.1	116.6	116.2	115.6	114.7	112.5	109.9	107.5	46
48	112.5	111.8	108.3	108.1	108.1	109.1	108.7	108.2	107.8	107.5	107.2	106.6	103.0	100.7	48
50	104.8	104.2	100.2	100.2	100.2	101.6	101.0	100.6	100.3	99.9	99.6	98.8	91.6	90.6	50
52	97.9	97.6	93.6	93.3	93.3	94.2	93.8	93.5	93.2	92.8	92.5	90.0	86.9	84.8	52
54	91.6	90.5	87.1	87.0	87.0	88.0	87.5	87.1	86.8	86.9	86.2	85.4	81.3	79.3	54
56	85.6	85.3	81.3	80.6	81.1	82.0	81.6	81.2	80.9	80.5	80.2	79.9	77.5	76.6	56
58	80.1	79.8	75.8	75.6	75.6	76.6	76.2	75.7	75.4	75.1	74.8	74.6	73.3	71.6	58
60	73.1	72.3	72.3	68.6	69.0	71.1	70.7	70.2	69.2	68.8	68.6	68.1	66.8	62.1	60
	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	82m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
12	258.1	258.4														12
14	245.3	245.6	253.5	259.5	262.8	258.4	273.6	271.5								14
16	236.7	242.1	250.0	255.7	253.6	254.3	266.9	275.3	276.0	274.4	266.3	277.1	277.1	274.3	278.6	16
18	235.4	229.1	243.4	248.3	248.9	247.6	260.7	267.7	269.8	277.6	259.6	271.9	279.3	278.2	282.4	18
20	222.5	227.5	235.4	240.1	240.7	241.3	253.8	261.2	263.9	271.5	253.2	266.7	275.0	274.8	280.8	20
21	218.8	223.6	231.5	236.2	237.2	237.4	252.8	260.1	263.2	270.8	249.8	269.5	272.9	276.5	278.5	21
22	215.0	219.6	227.6	232.2	233.7	233.4	251.7	259.0	262.5	270.1	246.4	272.2	270.7	278.2	276.2	22
24	207.7	212.3	220.2	223.8	226.7	230.5	244.4	256.5	260.7	262.3	243.6	260.0	269.2	274.0	273.9	24
26	200.4	208.9	208.9	221.0	227.2	222.9	242.0	248.8	243.3	249.3	230.9	246.4	251.8	251.4	251.3	26
27	195.8	204.2	207.3	217.2	217.6	213.6	235.8	242.3	237.1	242.9	223.1	240.1	242.0	242.0	242.0	27
28	191.2	199.4	205.6	213.3	208.0	204.2	229.6	234.5	230.9	233.4	215.3	232.3	235.0	235.0	235.0	28
30	187.8	198.9	200.7	208.1	199.0	196.6	217.5	217.3	215.4	216.2	204.0	215.1	214.9	214.5	214.4	30
32	179.6	190.2	189.6	196.5	185.1	182.0	202.3	202.1	200.1	200.9	192.1	199.8	199.7	199.2	199.2	32
34	178.3	185.2	175.7	185.1	177.4	171.7	188.7	188.5	186.5	187.4	181.5	186.3	186.1	185.7	185.6	34
36	168.1	177.4	165.6	174.4	167.2	164.6	176.5	176.3	174.4	175.2	171.2	174.1	173.9	173.5	173.4	36
38	160.5	167.7	155.6	166.2	159.7	154.9	165.6	165.4	163.4	164.2	161.6	163.1	162.9	162.5	162.4	38
40	150.5	157.8	149.4	156.2	151.0	146.3	155.6	155.4	153.4	154.3	151.6	153.1	153.0	152.5	152.5	40
42	142.2	148.7	142.3	147.2	143.9	142.6	142.2	141.1	140.8	140.5	140.2	139.9	139.6	139.3	139.0	42
44	135.2	140.5	135.4	138.9	136.5	132.3	130.9	130.6	130.3	130.0	129.7	129.4	129.1	128.8	128.5	44
46	130.4	131.1	130.1	131.3	128.9	123.1	121.9	121.6	121.3	121.0	120.7	120.4	120.1	119.8	119.5	46
48	121.5	123.6	121.7	123.8	121.5	114.6	113.4	113.1	112.8	112.5	112.2	111.9	111.6	111.3	111.0	48
50	116.1	116.1	115.1	115.9	113.5	106.5	105.9	105.6	105.3	105.0	104.7	104.4	104.1	103.8	103.5	50
52	109.1	108.6	108.2	109.1	106.8	100.0	98.9	98.6	98.3	98.0	97.7	97.4	97.1	96.8	96.5	52
54	102.6	102.1	101.8	102.6	100.6	93.2	92.6	92.3	92.0	91.7	91.4	91.1	90.8	90.5	90.2	54
56	96.2	96.5	95.9	95.8	93.1	87.5	86.7	86.4	86.1	85.8	85.5	85.2	84.9	84.6	84.3	56
58	88.6	89.1	87.1	87.3	87.3	82.2	81.0	80.7	80.4	80.1	79.8	79.5	79.2	78.9	78.6	58
60	83.8	84.2	81.9	82.1	79.5	76.5	76.2	75.9	75.6	75.3	75.0	74.7	74.4	74.1	73.8	60
	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
 4#	0	0	45	0	45	45	0	0	90	45	45	100	90	100	100	 4#
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
 m/s	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	 m/s

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	82m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
12															12
14															14
16	285.4	278.8	280.0												16
18	273.5	283.2	275.4	286.7											18
20	275.5	278.3	277.9	285.4	292.5	290.1	271.4	287.7	283.7	284.8					20
21	277.5	273.4	280.4	285.2	289.4	289.4	275.2	287.4	283.5	284.4					21
22	272.2	279.3	278.0	284.9	286.3	288.6	279.0	286.8	283.3	283.8	282.1	280.8	280.4		22
24	259.0	267.8	268.6	268.1	268.4	268.0	267.8	267.6	268.2	267.9	267.6	267.5	267.4	267.4	24
26	249.0	249.0	249.0	249.0	249.0	249.0	249.0	249.0	249.0	249.0	249.0	249.0	249.0	248.0	26
27	242.0	242.0	242.0	242.0	242.0	242.0	242.0	242.0	242.0	242.0	242.0	242.0	242.0	241.0	27
28	235.0	235.0	235.0	235.0	235.0	235.0	235.0	235.0	235.0	235.0	235.0	235.0	235.0	234.0	28
30	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	213.0	30
32	196.9	196.7	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	196.0	195.0	32
34	183.3	183.1	182.0	182.0	182.0	182.0	182.0	182.0	182.0	182.0	182.0	182.0	182.0	181.0	34
36	171.1	170.9	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	168.0	36
38	160.2	159.9	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	157.0	156.0	38
40	150.2	149.9	146.7	146.2	146.5	146.2	145.9	145.7	146.4	146.0	145.7	145.6	145.5	143.3	40
42	138.7	138.4	138.1	137.8	137.5	137.2	136.9	136.6	136.3	135.8	135.5	135.2	135.1	131.2	42
44	128.2	127.9	127.6	127.3	127.0	126.7	126.4	126.1	125.8	125.5	124.5	122.8	122.4	122.2	44
46	119.2	118.9	118.6	118.3	118.0	117.7	117.4	117.1	116.8	116.2	115.9	115.4	115.3	112.7	46
48	110.7	110.4	110.1	109.8	109.5	109.2	108.9	108.6	108.3	107.9	107.6	106.4	105.3	105.1	48
50	103.2	102.9	102.6	102.3	102.0	101.7	101.4	101.1	100.8	100.2	100.1	98.6	97.6	97.3	50
52	96.2	95.9	95.6	95.3	95.0	94.7	94.4	94.1	93.8	93.2	93.1	92.8	92.2	91.5	52
54	89.9	89.6	89.3	89.0	88.7	88.4	88.1	87.8	87.5	86.9	86.5	84.9	84.6	84.0	54
56	84.0	83.7	83.4	83.1	82.8	82.5	82.2	81.9	81.6	81.1	80.7	80.6	80.1	80.1	56
58	78.3	78.0	77.7	77.4	77.1	76.8	76.5	76.2	75.9	75.4	75.2	74.1	73.6	73.1	58
60	73.5	73.2	72.9	72.6	72.3	72.0	71.7	71.9	71.1	70.6	70.3	70.0	69.0	68.0	60
	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	76m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
12	225.8	226.8	235.3	236.4												12
14	222.9	223.9	227.6	228.7	237.5	235.0	233.5	236.6	243.4	246.5	243.2	248.7				14
16	212.5	213.5	216.1	217.2	224.9	223.5	230.3	230.6	242.3	235.3	236.4	237.2	250.8	251.3	258.4	16
18	201.1	202.0	210.9	212.6	215.5	217.9	228.4	230.2	230.8	236.7	225.3	231.7	240.2	246.5	253.3	18
20	194.4	195.2	203.7	205.3	208.6	206.9	221.0	222.6	224.0	224.1	224.2	226.4	235.1	242.2	248.2	20
21	189.3	192.0	200.3	201.8	205.3	203.7	217.6	219.1	220.5	223.3	220.7	225.5	234.5	244.7	245.6	21
22	184.2	188.7	196.8	198.3	201.9	200.4	214.1	215.5	216.9	222.4	217.2	224.6	233.9	247.1	242.9	22
24	175.3	182.5	190.2	191.7	195.5	200.4	207.1	212.8	215.1	215.8	210.1	217.1	232.4	236.0	242.1	24
26	172.5	176.7	183.7	185.7	192.5	193.5	199.7	205.8	215.1	213.8	203.3	215.3	229.1	235.0	241.0	26
27	168.6	172.7	179.6	181.5	191.1	187.6	198.2	204.2	211.6	210.7	202.1	212.0	227.8	231.8	236.1	27
28	164.6	168.6	175.4	177.3	189.6	181.7	196.7	202.5	208.0	207.5	200.8	208.6	226.4	228.5	231.1	28
30	164.1	168.0	171.7	177.0	186.1	181.5	192.0	197.6	203.2	204.6	192.2	210.0	214.8	215.6	215.5	30
32	156.9	160.7	167.5	169.3	178.0	173.6	191.4	197.0	198.7	200.6	185.1	200.9	200.8	200.4	200.3	32
34	153.3	154.0	163.1	168.1	173.3	169.7	183.5	185.6	187.6	188.5	177.3	187.4	187.2	186.8	186.7	34
36	148.8	147.5	159.4	161.1	163.3	162.6	177.6	177.4	175.5	176.3	167.1	175.2	175.1	174.6	174.5	36
38	142.5	145.9	152.3	159.4	156.1	152.9	166.7	166.5	164.5	165.3	162.4	164.2	164.1	163.7	163.6	38
40	137.9	141.2	150.3	150.6	147.3	144.4	156.8	156.5	154.6	155.4	150.9	154.3	154.1	153.7	153.6	40
42	147.8	148.5	146.5	146.8	144.3	141.5	146.5	146.3	144.3	145.6	141.6	143.7	142.8	142.5	142.3	42
44	137.8	138.6	136.6	137.1	138.4	135.6	136.9	136.6	134.3	135.3	131.5	133.4	135.0	134.7	134.4	44
46	127.5	128.2	126.0	126.4	124.6	121.7	127.7	127.4	125.2	126.1	122.2	124.2	124.8	124.5	124.2	46
48	119.3	120.0	117.5	118.2	116.3	113.0	119.0	118.8	116.3	117.5	113.2	115.8	116.1	115.8	115.5	48
50	111.7	112.5	109.7	110.2	108.5	106.2	111.5	111.3	109.0	110.1	106.1	108.1	108.3	108.0	107.8	50
52	105.3	106.6	104.1	104.7	102.6	100.2	105.1	104.8	102.1	103.1	99.6	101.2	101.5	101.2	100.9	52
54	98.3	99.5	97.2	98.1	95.3	93.5	98.9	98.6	96.1	97.0	92.5	94.9	94.9	94.6	94.3	54
56	93.1	94.0	91.7	91.5	88.6	86.3	91.9	91.6	89.2	90.1	86.2	88.8	88.8	88.5	88.2	56
58	87.6	88.6	86.1	86.3	83.8	81.3	86.6	86.3	83.8	84.9	81.1	83.4	83.4	83.1	83.1	58
60	78.8	79.5	77.3	78.1	75.5	72.9	78.1	77.9	75.6	76.8	73.1	75.4	75.7	75.4	75.4	60
	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
 4#	0	0	45	0	45	45	0	0	90	45	45	100	90	100	100	 4#
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	76m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
12															12
14															14
16	257.6														16
18	252.2	265.4	258.7	272.3	275.3	280.2	278.7								18
20	247.4	263.9	254.8	272.1	274.5	276.4	285.5	286.6	292.5	294.4	293.5				20
21	244.5	263.5	254.5	268.6	273.7	275.8	282.7	285.3	285.5	288.7	288.1				21
22	241.5	263.0	254.1	265.0	273.0	275.2	279.8	284.9	283.7	283.0	282.7	282.2	281.0	281.2	22
24	240.6	253.9	252.3	260.0	272.0	275.0	280.4	280.2	279.9	280.6	280.3	280.1	280.0	280.0	24
26	233.9	248.0	248.0	248.0	248.0	248.0	248.0	248.0	248.0	248.0	248.0	248.0	248.0	248.0	26
27	230.2	241.0	241.0	241.0	241.0	241.0	241.0	241.0	241.0	241.0	241.0	241.0	241.0	241.0	27
28	226.4	234.0	234.0	234.0	234.0	234.0	234.0	234.0	234.0	234.0	234.0	234.0	234.0	234.0	28
30	213.4	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	214.0	30
32	198.1	195.6	195.6	195.6	195.6	195.6	195.6	195.6	195.6	195.6	195.6	195.6	195.6	195.6	32
34	184.5	184.2	182.0	182.0	182.0	182.0	182.0	182.0	182.0	182.0	182.0	182.0	182.0	182.0	34
36	172.3	172.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	169.0	36
38	161.3	161.0	157.9	157.4	157.7	157.4	157.1	156.9	157.6	157.2	157.0	157.0	157.0	157.0	38
40	151.4	151.0	147.0	146.1	146.6	146.4	146.1	145.8	147.0	146.5	146.2	145.9	145.8	145.2	40
42	139.3	139.0	135.6	135.0	135.3	135.0	134.7	134.5	135.5	135.1	134.7	134.5	134.4	133.8	42
44	131.0	130.7	125.7	125.1	125.3	124.8	124.5	124.3	125.3	124.9	124.6	122.8	122.5	120.7	44
46	121.1	120.7	116.4	116.0	116.1	115.6	115.3	115.1	116.1	115.7	115.4	115.1	114.8	114.3	46
48	112.5	112.1	108.1	107.4	107.6	107.2	106.9	106.5	107.7	107.3	107.0	106.8	106.8	106.8	48
50	104.8	104.5	100.5	99.8	100.0	99.7	99.3	99.1	100.2	99.7	99.4	99.3	99.2	99.2	50
52	97.6	97.2	93.4	92.8	93.1	92.7	92.4	92.1	93.2	92.8	92.5	92.0	91.6	91.6	52
54	91.3	91.1	87.3	86.3	86.6	86.3	86.0	85.8	86.9	86.4	86.1	85.9	85.8	85.6	54
56	85.3	85.2	81.2	80.3	80.8	80.4	80.1	79.9	81.0	80.5	80.2	80.1	80.0	79.9	56
58	79.9	79.6	75.8	75.0	75.4	75.0	74.7	74.5	75.5	75.1	74.8	74.6	74.5	74.6	58
60	72.3	72.6	68.3	67.8	68.5	68.1	67.8	67.6	68.8	68.4	68.2	68.0	68.0	68.1	60
	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	70m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
12	225.7	227.7	233.9	236.2												12
14	213.4	216.0	225.7	223.5	225.4	230.8	233.3	235.1	243.0	245.9	235.0	238.2	252.1			14
16	197.6	203.4	210.6	216.4	217.5	214.8	222.4	230.4	231.6	234.3	226.8	235.9	242.0	248.9	255.8	16
18	193.0	198.6	199.2	204.6	205.9	208.8	213.7	220.1	221.2	222.9	216.5	225.1	241.9	245.0	248.9	18
20	182.4	184.6	192.4	193.6	200.3	197.5	206.6	209.7	216.5	216.7	209.5	218.7	234.4	241.9	244.5	20
21	177.5	181.3	185.9	188.9	196.9	193.9	203.5	206.5	212.5	213.7	206.2	215.7	230.9	238.7	242.4	21
22	172.6	178.0	179.3	184.1	193.4	190.3	200.3	203.2	208.5	210.7	202.8	212.6	227.3	235.5	241.3	22
24	167.0	166.6	173.4	178.0	183.8	180.4	197.0	196.8	206.8	204.5	192.2	210.2	225.3	228.9	238.6	24
26	158.9	163.9	167.7	172.1	177.3	174.2	194.6	190.6	200.0	200.7	186.0	208.6	218.7	227.4	233.9	26
27	156.0	159.5	163.9	168.1	173.3	170.3	190.8	189.1	195.6	198.3	184.4	204.2	215.3	223.8	229.4	27
28	153.0	155.1	160.0	164.1	169.3	166.3	186.4	187.5	193.1	195.8	182.8	200.1	211.8	220.0	226.8	28
30	143.6	148.0	154.0	160.4	165.6	162.8	182.9	182.5	191.2	191.9	174.7	198.5	209.6	208.4	206.7	30
32	139.8	144.1	147.2	153.5	158.4	155.8	178.5	178.1	186.1	177.6	170.6	190.2	192.8	190.2	186.6	32
34	133.7	137.8	143.3	149.3	154.8	149.4	175.7	172.3	179.4	161.8	163.4	180.8	175.4	171.3	178.1	34
36	132.3	136.2	139.9	143.0	145.9	145.1	164.6	160.0	166.3	147.2	153.8	164.2	163.0	168.2	167.2	36
38	124.7	130.5	135.8	141.4	141.7	136.8	148.4	149.4	151.8	138.9	147.5	154.0	158.7	165.4	160.4	38
40	121.1	126.3	131.4	130.4	134.9	132.5	137.9	137.2	140.2	128.2	138.4	140.6	152.9	150.1	148.5	40
42	116.9	118.2	126.0	121.2	129.5	127.2	131.0	127.1	136.5	115.7	127.6	136.7	136.5	136.3	138.8	42
44	112.2	111.6	116.1	111.6	117.4	119.2	119.6	123.1	130.6	109.4	118.7	133.5	128.3	127.7	127.3	44
46	106.8	104.3	108.5	104.3	109.7	113.2	116.1	117.5	118.3	102.4	111.1	124.3	124.3	118.2	119.2	46
48	101.2	97.3	102.6	98.7	103.8	107.1	113.6	113.8	112.8	95.7	103.8	115.9	115.4	114.5	113.9	48
50	92.9	89.3	97.2	90.7	98.5	100.0	108.8	101.2	108.4	89.2	98.3	107.7	103.8	106.9	106.4	50
52	87.9	84.5	89.3	85.9	90.5	93.3	93.4	94.6	92.0	83.3	91.8	93.6	96.6	98.4	100.8	52
54	83.1	79.9	84.4	80.0	85.6	86.9	90.5	84.7	85.6	77.7	85.6	88.3	90.8	88.2	91.2	54
56	78.5	75.5	78.6	75.6	81.1	83.7	82.3	80.4	81.0	73.5	81.0	85.1	85.7	77.7	84.2	56
58	74.1	71.2	75.6	72.8	76.7	79.1	78.4	73.2	70.7	69.7	76.9	80.0	78.3	75.4	77.4	58
60	69.8	67.1	71.4	68.7	73.8	72.3	74.1	67.3	66.7	65.8	72.7	75.2	75.6	72.8	74.6	60
	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
 4#	0	0	45	0	45	45	0	0	90	45	45	100	90	100	100	4# 
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
 m/s	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	 m/s

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	70m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
12															12
14															14
16	251.7														16
18	241.8	261.6	262.4	269.3	266.3	264.6	281.0								18
20	237.3	257.9	258.1	267.6	264.5	262.0	281.5	261.5	263.3	263.4	269.4				20
21	234.7	256.0	252.8	265.7	265.3	260.1	278.4	260.3	261.5	261.8	266.4				21
22	232.0	254.0	247.5	263.7	266.0	259.2	275.3	259.1	258.2	258.2	259.3	257.1	256.9	256.0	22
24	226.2	254.4	242.7	260.9	260.4	260.4	260.4	257.8	254.1	254.2	251.8	250.1	244.2	253.0	24
26	224.6	234.3	242.7	248.3	246.8	245.7	245.5	245.3	245.0	245.0	242.8	238.1	232.2	235.6	26
27	221.5	222.3	229.4	238.1	238.4	237.6	237.6	237.6	235.2	235.2	236.1	226.6	229.8	226.1	27
28	218.4	210.3	216.0	228.6	228.9	228.3	228.1	228.1	226.3	226.4	228.2	221.0	223.3	218.6	28
30	197.9	191.7	197.5	211.3	211.6	211.3	210.9	210.8	211.0	211.2	210.9	210.8	210.7	206.2	30
32	176.4	175.7	181.1	196.0	196.4	196.0	195.6	195.6	195.9	195.9	195.3	194.4	192.6	191.8	32
34	166.2	160.0	165.1	182.4	182.8	181.2	178.9	178.8	178.8	178.8	178.0	177.6	176.8	173.7	34
36	148.0	144.8	147.0	168.0	170.6	169.2	168.4	168.3	168.1	168.1	164.3	161.3	158.1	156.8	36
38	136.8	134.4	138.9	159.2	156.7	153.0	152.4	152.3	152.0	151.6	146.0	145.8	144.7	142.0	38
40	129.2	121.6	128.4	146.2	142.8	142.0	141.2	141.0	139.0	138.9	137.2	136.6	137.6	132.8	40
42	116.9	112.2	116.1	132.1	128.4	127.9	126.9	126.8	126.1	126.0	125.2	124.8	124.8	118.8	42
44	107.7	106.1	108.0	124.3	118.5	118.0	117.7	117.7	116.5	116.5	115.8	115.2	114.2	112.7	44
46	101.9	99.4	101.3	115.5	112.9	112.0	111.7	111.6	110.8	110.8	108.1	107.6	108.2	106.3	46
48	92.0	89.7	91.8	107.2	103.3	102.9	102.3	102.2	101.0	101.0	100.4	98.5	97.6	100.7	48
50	87.4	85.0	84.5	98.3	97.6	97.1	96.5	96.4	96.6	96.5	95.6	93.2	91.3	94.1	50
52	81.6	79.5	80.1	92.5	92.2	91.5	91.3	91.2	91.5	91.4	90.5	89.1	88.3	88.1	52
54	77.4	74.2	76.0	85.6	83.0	82.6	86.3	86.1	83.5	83.4	79.7	80.2	78.5	78.4	54
56	72.2	70.3	70.9	79.1	78.2	78.8	80.3	80.1	75.7	75.6	76.1	74.6	72.0	72.3	56
58	68.3	66.6	67.2	75.0	75.6	75.1	74.8	74.7	72.4	72.3	71.9	70.5	68.9	69.9	58
60	64.8	60.2	60.7	67.6	68.3	68.0	67.7	67.6	67.3	67.3	66.9	66.6	64.1	64.1	60
	12	12	12	12	12	12	12	12	12	12	12	12	12	12	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	64m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
12	235.5	238.2	244.5	245.0	251.5	248.4	262.5	263.8								12
14	227.2	229.8	236.0	236.5	243.1	240.5	249.3	255.8	255.8	262.2	245.6	264.9	265.3	280.1	277.7	14
16	211.4	213.8	217.8	222.7	231.5	229.4	242.0	242.8	244.1	249.8	237.3	252.2	268.0	273.8	272.2	16
18	200.2	203.0	212.8	215.8	223.5	220.9	237.7	234.9	238.5	244.3	229.6	246.4	254.8	267.8	267.2	18
20	197.8	196.2	205.1	210.4	211.7	210.1	229.5	227.8	231.3	236.8	228.2	238.8	253.2	255.1	268.3	20
21	191.1	193.2	201.5	206.7	208.2	204.6	225.6	224.4	227.8	233.2	224.3	235.1	249.6	254.7	267.3	21
22	184.4	190.1	197.9	202.9	204.6	199.1	221.6	220.9	224.2	229.5	220.3	231.3	246.0	254.2	266.3	22
24	178.6	184.1	185.1	189.8	197.7	192.6	209.9	217.4	221.9	222.3	208.7	228.7	243.9	252.9	263.9	24
26	169.9	175.1	182.2	186.7	194.4	186.4	204.3	207.3	214.9	219.9	205.5	221.4	236.4	251.4	251.2	26
27	168.1	173.2	178.0	182.4	188.4	183.9	202.4	207.4	213.2	218.4	200.8	216.7	234.9	244.0	242.7	27
28	166.2	171.2	173.8	178.1	182.4	181.4	200.5	207.5	211.4	216.9	196.1	212.0	233.3	235.7	234.1	28
30	158.6	163.3	169.9	174.1	181.8	177.4	191.7	198.2	206.3	207.3	192.4	211.6	218.9	211.2	208.9	30
32	152.0	159.0	165.3	166.4	173.8	169.6	190.8	197.3	201.4	198.9	181.1	202.7	195.3	192.5	190.4	32
34	145.3	152.1	158.1	165.1	166.3	162.4	182.8	180.4	186.4	181.9	173.4	182.9	177.9	175.3	180.4	34
36	143.7	147.5	153.9	158.1	159.3	155.6	166.3	164.1	169.6	165.4	166.2	166.3	164.8	172.4	170.5	36
38	139.0	145.3	147.4	153.8	149.6	146.3	151.9	151.5	154.1	152.8	161.3	156.9	160.1	166.6	164.4	38
40	133.1	139.2	140.3	146.4	144.8	141.6	141.1	140.7	143.1	141.9	152.3	142.6	155.2	154.3	153.4	40
42	130.9	132.3	135.4	136.0	138.9	135.8	132.2	129.7	139.1	130.8	140.5	139.4	140.9	142.7	143.0	42
44	128.5	121.6	130.0	127.2	132.5	130.2	121.7	126.4	133.1	120.6	130.3	138.1	130.8	132.9	131.2	44
46	119.5	114.9	121.4	117.0	123.3	120.0	118.9	120.9	123.0	114.0	121.0	128.5	124.1	122.6	122.8	46
48	113.2	108.8	113.2	109.1	115.8	109.5	115.9	117.5	115.6	106.6	112.5	120.3	115.8	115.4	115.3	48
50	105.4	101.3	108.8	103.2	108.8	104.6	110.3	109.1	108.2	99.5	105.6	111.6	107.5	108.2	107.6	50
52	99.6	92.8	101.3	97.7	101.6	96.2	102.1	100.9	101.1	91.4	98.2	103.6	100.7	100.8	100.8	52
54	92.5	87.6	95.8	89.6	94.3	90.2	95.8	93.1	94.3	86.6	97.4	100.9	92.9	93.7	93.4	54
56	87.3	82.6	89.1	84.6	88.3	82.3	90.5	89.5	88.5	81.9	85.7	88.5	88.5	82.6	86.8	56
58	82.2	79.0	84.1	79.8	83.1	80.2	85.0	82.1	83.3	77.4	80.6	83.1	82.2	80.3	80.7	58
60	77.5	75.7	76.1	76.4	74.6	71.2	77.2	76.6	74.3	73.2	71.6	74.4	75.0	74.7	74.6	60
	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
 4#	0	0	45	0	45	45	0	0	90	45	45	100	90	100	100	 4#
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
 m/s	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	 m/s

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	64m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
12															12
14															14
16	266.8	282.7	284.8												16
18	261.7	278.8	280.7	292.1	288.0	301.7	304.5								18
20	262.5	275.4	275.9	291.7	297.4	305.1	313.4	326.5	315.0	307.6	306.9	288.8	297.2		20
21	261.4	269.2	273.1	287.3	295.4	303.6	311.8	320.0	313.4	306.9	300.4	293.8	287.3		21
22	260.3	262.9	270.2	286.5	283.0	289.9	289.1	297.9	282.6	283.5	281.1	279.6	277.3	274.1	22
24	256.8	266.4	270.2	272.0	268.0	266.8	267.3	271.6	264.9	263.4	261.7	260.1	257.0	257.8	24
26	249.6	252.9	249.9	249.4	249.7	249.4	249.1	249.0	248.7	248.5	247.9	241.3	239.1	238.8	26
27	242.9	242.7	239.7	239.2	239.6	239.2	239.0	238.8	238.7	239.1	238.9	234.9	232.8	232.0	27
28	233.5	233.2	230.2	229.7	230.1	229.7	229.5	229.3	228.6	229.6	229.4	228.4	226.5	225.1	28
30	216.2	209.7	212.9	212.5	212.8	212.5	207.8	211.2	204.4	212.4	212.1	211.9	211.9	211.8	30
32	201.0	193.8	196.5	197.2	197.5	197.2	187.9	196.5	188.3	197.1	196.8	196.7	194.9	194.2	32
34	181.4	176.7	182.2	183.6	183.9	183.6	173.9	181.6	171.3	181.9	181.3	180.2	178.1	176.5	34
36	167.7	160.5	165.6	171.4	171.8	169.2	158.1	171.0	158.6	170.1	167.0	164.6	162.6	162.1	36
38	152.4	149.1	150.6	160.4	160.5	158.0	142.3	154.1	143.5	153.5	150.1	149.4	147.7	147.6	38
40	141.5	137.7	139.9	145.3	146.3	143.8	134.5	143.3	132.5	141.6	141.5	140.7	140.2	138.3	40
42	130.5	127.0	129.1	134.5	134.6	133.8	122.3	132.8	120.6	130.9	130.7	129.2	126.1	123.9	42
44	118.4	115.2	117.1	122.5	122.9	122.3	112.8	121.4	113.1	120.5	119.5	118.0	117.2	116.8	44
46	112.0	109.0	110.8	115.0	115.7	115.3	103.9	114.5	106.0	112.7	111.7	111.2	110.3	108.1	46
48	104.7	101.9	103.7	106.2	106.7	106.6	98.4	105.9	100.4	105.2	103.1	102.3	101.4	101.1	48
50	97.8	93.8	93.5	99.5	100.0	99.3	88.7	98.3	90.5	98.7	97.6	96.3	95.6	95.5	50
52	91.3	87.5	88.6	92.0	92.7	92.4	82.9	92.0	84.6	93.3	92.1	91.8	91.0	90.2	52
54	85.3	83.0	82.8	86.0	86.5	86.1	78.6	85.6	80.3	85.0	83.6	82.5	81.7	80.7	54
56	80.8	77.4	78.5	81.0	81.4	81.7	74.6	79.5	75.0	78.8	78.5	77.4	75.8	76.6	56
58	75.2	74.6	73.1	74.3	75.3	74.8	69.5	72.9	71.1	74.8	73.8	73.7	73.6	71.9	58
60	71.5	69.6	67.2	67.0	67.7	67.4	66.0	67.1	66.1	68.2	68.2	68.2	67.7	67.2	60
	14	14	14	14	14	14	14	14	14	14	14	14	14	14	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	58m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
12	245.7	250.5	254.1	254.7	258.8	264.3	271.3	281.1	283.5	288.0	271.4	278.1				12
14	234.7	239.2	245.5	251.1	255.5	250.0	263.3	266.6	269.6	273.9	268.3	276.7	290.9	297.1	292.2	14
16	222.1	230.9	232.4	237.7	240.9	244.5	257.3	260.2	262.6	266.6	261.3	269.2	283.4	290.3	290.5	16
18	211.1	218.6	224.6	229.7	240.2	235.7	249.2	257.1	255.2	259.0	252.5	261.3	283.2	287.6	288.7	18
20	204.1	207.2	217.1	222.0	231.5	227.3	241.4	248.7	252.1	255.9	244.1	258.8	267.8	286.3	296.0	20
21	201.4	206.1	213.8	220.7	227.4	223.4	237.6	244.8	248.3	252.0	240.0	254.9	267.1	285.5	288.9	21
22	198.7	205.0	210.4	219.3	223.3	219.4	233.7	240.8	244.5	248.1	235.9	250.9	266.4	284.6	281.7	22
24	188.8	194.8	207.0	212.2	212.5	205.4	230.9	237.7	245.8	245.5	228.0	248.2	263.8	279.6	279.6	24
26	185.4	191.1	197.0	205.8	208.9	206.2	231.4	231.3	239.2	242.7	228.7	245.2	257.5	257.1	257.0	26
27	183.2	188.4	194.8	203.5	206.1	201.5	226.0	231.4	239.0	237.3	221.7	242.2	247.4	247.0	246.9	27
28	180.9	185.7	192.6	201.2	203.3	196.7	220.6	231.5	238.2	231.9	214.6	238.0	237.9	237.5	237.5	28
30	172.4	178.3	187.3	191.9	195.3	189.3	215.0	221.1	221.0	221.8	206.2	220.8	220.7	220.3	220.3	30
32	170.7	176.5	179.3	187.3	186.7	181.3	207.9	207.7	205.8	206.7	197.1	205.6	205.5	205.1	205.1	32
34	163.1	168.7	171.5	182.5	175.9	173.4	194.4	194.2	192.3	193.1	185.6	192.1	192.0	191.6	191.5	34
36	161.0	166.4	163.7	174.1	170.6	165.6	182.2	182.1	180.2	181.0	177.8	179.9	179.8	179.4	179.4	36
38	153.1	159.3	155.8	166.7	167.5	164.5	170.5	170.2	167.2	168.6	164.0	167.0	167.4	167.0	166.6	38
40	146.6	156.7	149.3	157.5	154.5	151.5	157.5	157.2	154.2	155.6	151.0	154.0	154.3	154.0	153.0	40
42	141.7	148.1	144.1	146.6	143.6	140.6	146.6	146.3	143.3	144.7	140.1	143.1	143.8	143.5	143.2	42
44	134.2	137.1	135.1	135.8	132.8	129.8	135.8	135.5	132.5	133.9	129.3	132.3	133.0	132.8	132.2	44
46	127.8	128.5	126.4	127.1	124.1	121.1	127.1	126.8	123.8	125.2	120.6	123.6	124.3	124.0	123.7	46
48	119.4	120.1	118.1	118.8	115.8	112.8	118.8	118.5	115.5	116.9	112.3	115.3	116.0	115.8	115.5	48
50	111.9	112.6	110.6	111.3	108.3	105.3	111.3	111.0	108.0	109.4	104.8	107.8	108.2	107.8	107.6	50
52	104.8	105.5	103.5	104.2	101.2	98.2	104.2	103.9	100.9	102.3	97.7	100.7	101.2	100.8	100.6	52
54	98.3	99.0	96.9	97.6	94.6	91.6	97.6	97.3	94.4	95.8	91.2	94.1	94.7	94.4	94.1	54
56	92.3	93.0	90.8	91.5	88.5	85.2	91.2	90.7	88.8	90.2	85.6	88.2	88.9	88.1	87.3	56
58	86.8	87.6	85.3	86.1	83.1	80.0	86.1	85.6	83.3	84.7	80.1	83.1	83.8	83.6	83.1	58
60			75.0	75.7	73.2	70.2	76.4	76.3	74.1	75.5	71.0	73.9	74.7	74.6	74.6	60
	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
 4#	0	0	45	0	45	45	0	0	90	45	45	100	90	100	100	 4#
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	58m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
12															12
14	290.1														14
16	287.9	302.0	304.3												16
18	282.2	301.8	307.3	325.8	327.2	326.9	322.2	329.4	326.2	323.2					18
20	275.4	305.7	293.7	322.3	319.8	314.5	325.3	322.0	319.6	320.6	316.1	312.4	310.1	303.3	20
21	275.2	303.7	298.2	312.7	310.5	307.4	311.8	310.3	307.1	306.8	303.5	300.3	295.2	289.9	21
22	274.9	301.6	300.6	300.2	300.5	300.2	298.3	298.5	294.5	292.9	290.9	288.2	280.3	276.5	22
24	274.2	277.3	274.3	273.9	274.2	273.9	273.7	273.5	273.0	273.3	268.8	264.1	262.4	258.3	24
26	254.9	254.7	251.7	251.3	251.6	251.3	251.1	250.9	251.6	251.2	245.7	242.2	240.0	239.5	26
27	244.8	244.6	241.6	241.1	241.5	241.1	240.9	240.7	241.4	241.1	238.9	235.7	233.6	232.7	27
28	235.2	235.1	232.1	231.6	232.0	231.6	231.4	231.2	231.9	231.4	231.3	229.1	227.2	225.8	28
30	218.1	217.9	214.8	214.4	214.7	214.4	214.2	213.5	214.7	214.3	214.1	213.9	213.8	212.8	30
32	202.9	202.7	199.6	199.1	199.5	199.2	198.9	198.7	199.4	199.1	198.3	197.2	196.6	195.0	32
34	189.3	189.1	186.0	185.5	185.9	185.6	185.3	182.1	185.8	182.5	181.9	180.8	178.5	177.9	34
36	177.2	177.0	173.8	173.4	173.7	173.4	173.1	172.0	173.7	171.5	169.3	164.9	163.1	162.3	36
38	163.9	163.6	158.6	158.0	158.6	158.3	158.0	158.0	158.0	156.4	155.8	152.6	151.5	150.5	38
40	150.4	150.1	145.7	145.1	146.2	145.7	145.4	145.1	146.5	142.5	141.7	140.9	140.5	138.7	40
42	140.0	139.6	134.6	134.0	135.1	134.9	134.6	134.2	135.3	131.9	131.1	130.1	126.8	125.1	42
44	130.0	129.6	124.6	124.0	124.6	124.3	124.0	123.2	125.3	121.8	120.3	119.6	118.6	118.0	44
46	121.0	120.7	115.7	115.4	116.5	116.0	115.7	115.4	116.5	113.3	112.4	111.6	110.7	109.0	46
48	111.9	111.6	106.6	106.0	107.0	106.9	106.6	106.3	107.8	107.5	103.8	102.8	101.8	101.3	48
50	104.3	104.2	99.3	99.0	100.0	99.6	99.3	99.0	100.2	99.2	98.3	96.9	95.8	95.7	50
52	97.6	97.3	92.3	91.8	92.9	92.6	92.3	92.0	93.1	92.6	92.6	92.3	91.4	90.8	52
54	91.0	91.0	85.9	85.6	86.6	86.3	86.0	85.6	86.6	85.9	84.1	83.0	82.1	80.9	54
56	85.1	85.0	80.0	79.6	80.6	80.3	80.0	79.6	81.1	80.8	78.8	77.6	76.9	76.7	56
58	79.6	80.0	74.6	74.3	75.3	75.0	74.6	74.3	75.6	75.3	74.8	74.7	74.0	73.0	58
60	71.3	71.6	66.7	66.5	67.6	67.2	66.9	66.6	68.3	68.0	67.5	67.9	67.9	67.6	60
	14	14	14	14	14	14	14	14	14	14	14	14	14	14	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	52m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
12	259.7	265.6	263.9	270.8	276.8	273.3	286.0	291.7	290.9	297.3	280.4	300.7	297.2			12
14	245.4	250.9	257.3	264.0	262.0	259.1	281.9	285.5	282.4	288.5	277.3	291.6	310.2	311.2	309.3	14
16	236.9	238.1	248.4	254.8	253.5	251.1	272.1	282.6	282.1	287.9	267.1	290.8	301.9	311.7	307.5	16
18	235.0	229.9	235.4	246.1	250.4	255.2	268.2	278.3	279.1	284.7	259.0	287.3	299.6	302.9	309.4	18
20	218.4	227.4	227.5	237.8	247.8	241.1	264.3	268.5	270.2	275.7	262.2	283.8	297.0	309.6	316.9	20
21	225.6	227.1	232.5	240.7	242.7	244.3	262.6	269.4	268.6	278.5	258.6	279.2	295.6	308.7	316.3	21
22	216.1	224.2	229.5	235.2	235.0	233.3	260.9	270.3	266.9	272.3	258.1	274.6	294.1	306.9	306.9	22
24	205.0	212.7	218.1	227.8	236.0	229.9	248.1	256.9	269.1	274.5	245.5	276.7	281.1	280.7	280.7	24
26	204.5	212.2	214.0	223.4	229.0	223.2	253.6	249.9	258.9	259.7	241.4	258.6	258.6	258.2	258.2	26
27	199.9	207.4	213.0	222.4	226.4	220.7	247.7	250.6	248.8	249.6	236.0	248.5	248.5	248.1	248.0	27
28	194.7	202.0	207.9	217.0	216.7	211.4	241.3	241.1	239.3	240.1	226.4	239.1	239.0	238.6	238.6	28
30	193.2	200.4	199.6	211.7	206.8	201.8	224.1	224.0	222.1	222.9	217.7	221.9	221.8	221.5	221.4	30
32	181.5	191.2	190.8	202.2	198.0	193.4	209.0	208.8	206.9	207.8	205.2	206.7	206.6	206.3	206.2	32
34	176.6	188.9	182.3	195.9	189.4	184.8	195.4	195.3	193.4	194.2	191.6	193.2	193.1	192.7	192.7	34
36	168.1	183.2	173.8	182.3	179.3	175.9	182.5	182.1	179.5	181.0	176.2	179.2	179.8	179.5	179.3	36
38	160.8	170.2	166.3	168.7	165.7	162.3	168.9	168.5	165.9	167.4	162.6	165.6	166.2	165.9	165.7	38
40	152.8	157.4	155.0	156.0	153.0	149.6	156.2	155.8	153.2	154.7	149.9	152.9	153.5	153.2	153.0	40
42	145.0	145.6	143.2	144.2	141.2	137.8	144.4	144.0	141.4	142.9	138.1	141.1	141.7	141.4	141.2	42
44	135.0	135.7	133.3	134.3	131.3	127.9	134.5	134.1	131.5	133.0	128.2	131.2	131.8	131.5	131.3	44
46	125.4	126.4	124.0	125.0	122.0	118.6	125.2	124.8	122.2	123.7	118.9	121.9	122.5	122.2	122.0	46
48	117.6	118.6	116.2	117.2	114.2	110.8	117.4	117.0	114.4	115.9	111.1	114.1	114.7	114.4	114.2	48
50	109.7	110.7	108.3	109.3	106.3	102.9	109.5	109.1	106.5	108.0	103.2	106.2	106.8	106.5	106.3	50
52	102.8	103.8	101.4	102.4	99.4	96.0	102.6	102.0	99.4	100.9	96.1	99.1	99.7	99.4	99.2	52
54	96.5	97.4	94.8	95.8	92.8	89.4	96.0	95.8	93.2	94.7	89.9	92.9	93.5	93.2	93.1	54
56			89.0	90.0	87.0	83.6	90.2	90.1	87.5	89.0	84.2	87.2	87.8	87.5	87.3	56
58			83.6	84.5	81.4	78.2	84.8	84.6	82.0	83.5	78.7	81.7	82.3	82.0	82.0	58
60					71.2	67.8	74.4	74.4	72.3	73.6	69.0	72.1	73.2	73.0	73.2	60
	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
 4#	0	0	45	0	45	45	0	0	90	45	45	100	90	100	100	 4#
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
 m/s	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	 m/s

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	52m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
12															12
14	306.7	323.0	323.2												14
16	308.3	318.6	326.4	334.0	328.7	335.8	327.1	344.4	328.8						16
18	302.4	318.4	320.6	328.5	329.6	330.5	334.8	330.1	338.1	334.3	330.1	349.9	334.6	328.9	18
20	305.5	329.8	317.8	323.9	332.6	327.7	331.8	331.8	325.6	323.1	319.6	320.6	321.6	322.6	20
21	305.1	314.4	316.5	316.1	316.4	316.1	315.9	315.7	316.4	308.2	315.8	304.1	297.3	291.3	21
22	304.8	304.6	301.7	301.3	301.6	301.3	301.1	300.9	298.3	293.2	300.0	296.0	281.6	282.5	22
24	278.6	278.4	275.4	275.0	275.4	275.0	274.8	274.6	273.7	275.0	269.3	270.9	262.6	258.6	24
26	256.0	255.9	252.9	252.4	252.8	252.5	252.2	252.0	244.5	252.4	247.6	246.6	245.6	241.8	26
27	245.9	245.7	242.7	242.3	242.6	242.3	242.1	241.9	242.6	242.2	241.8	241.9	237.4	233.7	27
28	236.4	236.3	233.2	232.8	233.1	232.8	232.6	232.4	228.0	232.8	232.5	231.8	229.2	232.3	28
30	219.2	219.1	216.0	215.5	215.9	215.6	209.1	215.2	206.7	215.5	215.3	215.1	215.0	213.6	30
32	204.0	203.8	200.7	200.3	200.7	200.3	194.4	198.9	188.7	200.3	200.0	198.4	198.2	198.1	32
34	190.5	190.3	187.2	186.7	187.1	186.8	180.3	186.3	174.7	185.7	186.5	184.2	184.0	180.8	34
36	176.3	176.3	172.3	170.6	174.9	171.0	167.0	171.1	164.6	174.5	170.9	166.9	163.4	167.5	36
38	162.7	162.7	158.0	156.6	157.5	157.0	152.0	156.6	151.2	158.1	157.8	157.6	154.3	155.5	38
40	150.0	150.0	145.5	143.9	144.7	144.5	143.6	144.1	142.1	142.7	142.5	144.5	140.5	144.1	40
42	138.2	138.2	134.2	132.8	133.8	133.5	132.8	132.5	132.8	132.4	133.5	133.2	129.7	127.4	42
44	128.3	128.3	124.1	122.5	123.0	122.6	121.6	122.5	121.4	120.2	119.9	119.7	122.8	120.6	44
46	119.0	119.0	115.0	113.5	114.5	114.0	113.8	113.6	113.1	112.7	112.5	112.2	114.1	113.0	46
48	111.2	111.2	107.0	105.3	106.6	106.0	105.7	105.4	105.2	104.8	104.5	104.3	102.5	102.0	48
50	103.3	103.3	99.2	97.3	98.6	98.3	97.8	97.6	99.2	98.8	98.5	98.3	97.0	96.6	50
52	96.2	96.5	92.1	90.5	91.9	91.6	91.0	90.8	92.4	92.0	91.7	91.5	91.5	91.3	52
54	90.1	90.1	86.0	84.3	85.5	85.0	84.8	84.5	86.0	85.6	85.3	84.8	83.5	82.1	54
56	84.3	84.3	80.3	78.2	80.3	79.5	79.0	79.0	80.2	79.8	79.5	79.3	77.8	77.9	56
58	78.5	78.3	74.5	73.1	76.0	75.8	73.5	73.3	74.7	74.3	74.2	74.0	74.0	73.6	58
60	70.3	70.3	67.0	65.1	66.3	65.9	65.6	65.5	67.0	66.6	66.5	66.3	65.9	66.5	60
	16	16	16	16	16	16	16	16	16	16	16	16	16	16	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	46m															
	30.2	30.2	35.8	35.8	41.4	41.4	41.4	42.6	47.0	47.0	47.0	48.2	52.5	55.0	56.3	
12	270.7	276.0	272.7	283.9	282.3	281.8	303.0	300.7	303.7	302.1	293.2	311.9	325.6	335.9	340.0	12
14	255.3	265.3	268.3	273.8	275.5	264.4	301.4	291.6	298.2	296.6	283.6	309.6	324.0	327.4	338.9	14
16	245.9	255.4	258.9	264.2	266.1	275.9	296.8	289.1	305.1	303.3	280.4	298.7	317.0	324.6	337.6	16
18	243.3	252.6	262.0	261.0	262.2	265.4	286.5	300.3	300.7	298.9	271.6	296.3	321.5	324.1	337.4	18
20	230.0	238.8	247.4	257.3	258.5	261.6	282.3	295.3	300.0	301.5	268.2	297.0	317.1	318.2	335.6	20
21	230.7	239.5	248.1	257.9	259.6	257.1	278.0	290.6	301.1	293.6	269.5	295.5	315.9	317.1	323.4	21
22	231.4	240.2	248.7	258.5	260.7	252.6	273.6	285.9	302.2	285.7	270.7	294.1	309.0	308.7	308.6	22
24	219.7	228.0	235.9	245.2	247.6	248.3	281.1	284.9	283.1	283.9	262.9	282.9	282.9	282.5	282.5	24
26	215.9	227.5	235.3	241.0	243.6	236.0	262.6	262.4	260.7	261.4	258.6	260.4	260.4	260.0	260.0	26
27	215.1	226.6	227.9	235.0	236.0	231.4	252.5	252.3	250.6	251.3	248.8	250.3	250.3	249.9	249.9	27
28	214.2	225.7	220.4	227.0	228.4	226.8	243.1	242.9	241.1	241.9	239.4	240.9	240.8	240.5	240.4	28
30	204.0	219.0	211.2	221.0	222.7	212.8	225.9	225.7	224.0	224.8	222.2	223.7	223.7	223.3	223.3	30
32	194.8	212.3	210.0	208.0	209.0	206.9	210.8	210.6	208.8	209.6	207.0	208.5	208.5	208.1	208.1	32
34	185.4	199.0	197.0	198.0	194.0	191.0	197.3	197.1	195.3	196.1	193.5	195.0	195.0	194.6	194.6	34
36	177.0	183.0	179.8	180.8	176.8	173.8	180.8	180.5	178.0	179.7	174.7	178.9	178.9	178.6	178.3	36
38	168.0	168.8	165.8	166.8	162.8	159.8	166.8	166.5	164.0	165.7	160.7	164.9	164.9	164.6	164.3	38
40	155.0	156.0	153.3	154.3	150.3	147.3	154.3	154.0	151.5	153.2	148.2	152.4	152.4	152.1	151.8	40
42	144.0	145.0	142.1	143.1	139.1	136.1	143.1	142.8	140.3	142.0	137.0	141.2	141.2	140.9	140.6	42
44	134.0	135.0	131.9	132.9	128.9	125.9	132.9	132.6	130.1	131.8	126.8	131.0	131.0	130.7	130.4	44
46	125.0	126.0	123.0	124.0	120.0	117.0	124.0	123.7	121.2	122.9	117.9	122.1	122.1	121.8	121.5	46
48	116.2	117.2	114.5	115.5	111.5	108.5	115.5	115.2	112.7	114.4	109.4	113.6	113.6	113.3	113.0	48
50	108.6	109.6	107.2	108.2	104.1	101.1	108.1	107.8	105.3	107.0	102.0	106.2	106.2	105.9	105.6	50
52			100.3	101.0	97.3	94.3	101.3	101.0	98.5	100.2	95.2	99.4	99.4	99.1	98.8	52
54			94.0	95.0	92.0	88.1	95.1	94.8	92.3	94.0	89.0	93.2	93.2	92.9	92.6	54
56					86.0	82.5	89.3	89.0	86.5	88.2	83.2	87.4	87.4	87.1	86.6	56
58							83.8	83.5	81.3	83.0	77.8	82.0	82.0	81.8	81.8	58
60							73.2	73.2	71.0	72.6	67.6	72.3	72.3	72.3	72.3	60
	16	16	16	16	16	16	16	16	16	16	16	16	16	16	16	
2#	0	0	0	0	0	45	0	0	0	0	45	0	0	0	0	2#
3#	0	0	0	0	45	45	0	0	0	0	45	0	0	0	0	3#
	4#	0	45	0	45	45	0	0	90	45	45	100	90	100	100	4#
5#	45	0	45	90	45	45	90	100	90	90	45	90	90	100	100	5#
6#	45	90	45	45	45	0	90	90	45	90	45	45	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	

Load Chart - Telescopic Boom + Fixed Jib + Superlift Device (TSJ)

性能表 - 主臂 + 副臂 + 超起



Unit: t

	46m														
	58.1	63.7	63.7	67.4	69.3	70.5	71.8	73.0	74.9	76.1	77.3	78.6	79.8	81.1	
12	315.5														12
14	317.0	326.6	331.2	362.3	379.2										14
16	318.4	339.4	342.7	360.6	375.9	378.2	362.5								16
18	318.0	343.4	345.6	357.6	374.8	375.0	363.2	351.3	353.9	345.0	338.3	350.5	343.5	334.2	18
20	317.3	337.3	334.4	334.0	334.4	333.2	333.7	333.7	329.3	329.1	324.6	330.3	324.1	322.8	20
21	320.2	321.2	318.3	317.9	318.3	318.0	317.6	317.6	312.8	312.6	317.7	312.6	308.0	297.6	21
22	306.6	306.5	303.5	303.1	303.5	303.2	303.0	302.8	303.3	303.1	300.6	302.6	291.9	287.8	22
24	280.4	280.3	277.3	276.9	277.3	276.9	277.0	276.5	277.1	276.9	276.7	272.3	266.8	264.1	24
26	257.9	257.7	254.7	254.3	254.7	254.4	254.3	254.0	254.5	254.3	249.7	249.2	253.9	251.0	26
27	247.8	247.6	244.6	244.2	244.5	244.2	244.0	243.8	244.4	244.2	244.0	243.8	243.7	238.6	27
28	238.3	238.2	235.1	234.7	235.1	234.7	234.6	234.3	234.9	234.7	234.5	232.3	234.3	234.2	28
30	221.1	219.5	217.9	217.5	217.9	217.5	217.3	217.1	217.7	217.5	217.3	217.1	217.0	216.3	30
32	205.9	203.6	202.7	202.3	202.6	202.3	202.0	201.9	201.6	201.4	202.0	200.4	201.8	199.7	32
34	192.4	191.0	186.8	186.6	187.6	187.3	187.0	186.8	188.2	188.0	187.0	184.3	184.2	183.0	34
36	175.3	173.4	170.8	170.6	171.6	171.3	171.0	170.5	171.9	171.7	171.5	170.6	169.8	169.7	36
38	161.3	161.3	156.0	155.8	156.8	156.5	156.2	156.2	157.6	157.4	157.1	157.0	155.0	156.4	38
40	148.8	148.8	143.6	143.4	144.4	144.1	143.8	143.6	145.0	144.8	144.6	144.2	142.3	145.5	40
42	137.6	137.6	132.4	132.2	133.2	132.9	132.6	132.6	134.0	133.8	133.5	133.0	132.3	128.2	42
44	127.4	127.4	122.2	122.0	123.0	122.7	122.4	122.3	123.7	123.5	123.2	123.1	123.1	122.2	44
46	118.5	118.5	113.3	113.1	114.1	113.8	113.5	113.3	114.7	114.5	114.5	114.4	114.4	114.4	46
48	110.0	110.0	104.8	104.6	105.6	105.3	105.0	104.8	106.2	106.0	105.8	105.4	104.0	102.7	48
50	102.6	102.6	97.4	97.2	98.2	97.9	97.6	97.4	98.8	98.6	98.4	98.3	98.3	97.7	50
52	95.8	95.8	90.6	90.4	91.4	91.1	90.8	90.6	92.0	91.8	91.6	91.6	91.6	91.6	52
54	89.6	89.6	84.4	84.2	85.2	84.9	84.6	84.3	85.7	85.5	85.3	85.3	85.3	85.3	54
56	83.6	83.6	78.4	78.2	79.2	78.9	78.6	78.4	79.8	79.6	79.5	79.4	79.4	79.4	56
58	78.5	78.5	73.1	72.8	73.8	73.5	73.2	73.2	74.5	74.3	74.1	74.1	74.1	74.1	58
60	68.6	69.5	64.3	64.3	65.4	65.1	65.0	64.9	66.6	66.4	66.4	66.4	66.4	66.4	60
	16	16	16	16	16	16	16	16	16	16	16	16	16	16	
2#	0	0	90	100	90	100	100	100	90	100	100	100	100	100	2#
3#	90	90	90	100	90	90	100	100	90	90	100	100	100	100	3#
4#	90	90	90	100	90	90	90	100	90	90	90	100	100	100	4#
5#	90	90	90	45	90	90	90	90	90	90	90	90	100	100	5#
6#	45	90	0	45	45	45	45	45	90	90	90	90	90	100	6#
	8	8	8	8	8	8	8	8	8	8	8	8	8	8	



SANY GROUP CRANE BU

SANY Mobile Crane and Tower Crane Industrial Park

No.168 Jinzhou Avenue, Jinzhou Development Zone, Changsha City, Hunan Province, P.R. China Zip 410600

SANY Crawler Crane Industrial Park

No. 2188 Daishan Road, Wuxing District, Huzhou City, Zhejiang Province, P. R. China Zip 313028

Consulting sanycrane@sanygroup.com (Crane BU) / crd@sany.com.cn (IHQ)

After-sales Service 0086-400 609 8318 (Overseas)

Reminder:

Any change in the technical parameters and configuration due to product modification or upgrade may occur without prior notice.

The machine in the picture may include additional equipment. This brochure is for reference only, and goods in kind shall prevail.

Copyright at SANY. No part of this brochure may be copied or used for any purpose without written approval from SANY.

© Edited in August 2025

三一集团起重事业部

三一轮式、塔式起重机产业园：中国湖南长沙金洲开发区金洲大道168号 邮编：410600

三一履带起重机产业园：中国浙江湖州市吴兴区黛山路2188号 邮编：313028

咨询：sanycrane@sanygroup.com(起重事业部) / crd@sany.com.cn(国际总部)

售后服务：0086-400 609 8318(海外)

温馨提示：

由于技术不断更新，技术参数及配置如有更改，恕不另行通知。图中机器可能包括附加设备，本画册仅供参考，以实物为准。

版权为三一所有，未经三一书面许可，本画册任何内容不得被复制用于任何目的。

© 2025年8月版

🌐 SANY GROUP: www.sanygroup.com | SANY USED CRANE: sanyusedcranes.en.alibaba.com

SANY CRANE | 

📺 YouTube | [@sanycrane4878](https://www.youtube.com/@sanycrane4878)

🌐 LinkedIn | [Sany-crane](https://www.linkedin.com/company/sany-crane)

📘 Facebook | [SANYCraneGlobal](https://www.facebook.com/SANYCraneGlobal)

