

# JIANGSHAN 495 (EXPRESS VERSION)



## LONG ENDURANCE

It is equipped with 800 + 400L dual fuel tanks, and the main fuel tank has heating function to improve the endurance;

## HIGH ATTENDANCE RATE

60,000 km long maintenance of engine, B10 service life of 1.5 million km. All front and rear axles are maintenance-free, which can reduce the maintenance frequency and improve the attendance rate.


## LARGE VOLUME

It is designed with 50 low saddle, saddle height  $\leq 1190$  mm, wheelbase: 4,000 mm, front slewing radius: 2,500 mm, suitable for larger volume containers.



## LOW FUEL CONSUMPTION

Sany Deutz special engine for reducing State VI fuel consumption is independent VCU variable load support with more fuel saving. Deutz engine is equipped with FAST AMT transmission, having the accurate calibration and a variety of fuel-saving technologies. It can save money for you.

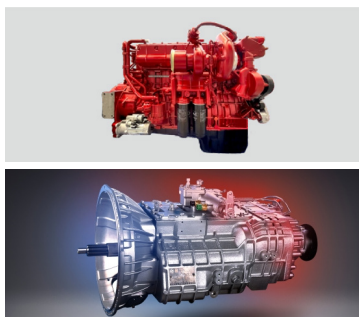

## APPLICABILITY

It is equipped with two front leaf springs and four rear airbag suspensions, optional leaf spring suspension, airbag suspension with adjustable height as standard, which can save the loading/unloading time and meet the requirements of efficient express transportation. At the same time, the four-airbag suspension can further improve the shock absorption performance. It is equipped with a 1,000 W inverter to meet the power requirements of long-distance transportation.



# PARAMETER TABLE OF JIANGSHAN 495 EXPRESS VERSION

Model		JIANGSHAN495AS	JIANGSHAN495MS
Parameters of complete vehicle	Announcement model	HQC41800S1S12E	←
	Drive mode	4 × 2	←
	Overall dimension (L × W × H, mm)	6465 × 2545 × 3910	←
	Wheelbase (mm)	4000	←
	Tyre specification	295/80R22.5	←
	Number of leaf springs	2/–	2/4+3
	Kerb mass (kg)	7500	←
	Maximum speed (km/h)	89	←
Cab	Width of upper/lower berth (mm)	650/850	←
	Number of passengers	2	←
Engine	Model	D12–490E0	←
	Rated power (kW)/speed (r/min)	360/1900	←
	Displacement (L)	12.12	←
Transmission	Model	Fast F12JZ–OD overspeed gear	Fast 12JSDX240TAoverspeed gear
	Number of gears	12 (auto)	12(manul)
Driving axle	Speed ratio	3.364	←
Configuration description			
Tyre model	295/80R22.5		
Rim	Aluminum for front rim and steel for rear rim		Optional
	All–aluminum rim		●
	All–steel rim		Optional
Supply system	Fuel tank	800L single fuel tank	Optional
		800L dual–chamber fuel tank	Optional
		800L+400L double fuel tank	●
Cab	Hydraulic retarder		Optional
	Maintenance–free wheel hub		●
	Optional color	Sany red	●
		Vitality red	Optional
	Top cover	Enclosed	●
		Sunroof (manual)	Optional
		220Ah battery	●
	Air deflector		●
Fuel theft prevention	Anti–theft controller + ultrasonic radar		Optional
Video domain	AVM (around view monitor, i.e. 360° panoramic view) +BSD (blind spot detection) +DMS (driver fatigue monitor system) +LCA (lane change assist system)		Optional
Domestic power supply	1000W inverter + independent socket		●
Others	Atmosphere lamp + dust air gun		Optional
	Onboard refrigerator		Optional
	LOGO light + welcome light		Optional
	Blind spot detection		Optional
	Independent heater		Optional